


Iris U.S. Customer Service
800.323.9906
www.irisus.com



USIRISBS13



Made in the USA

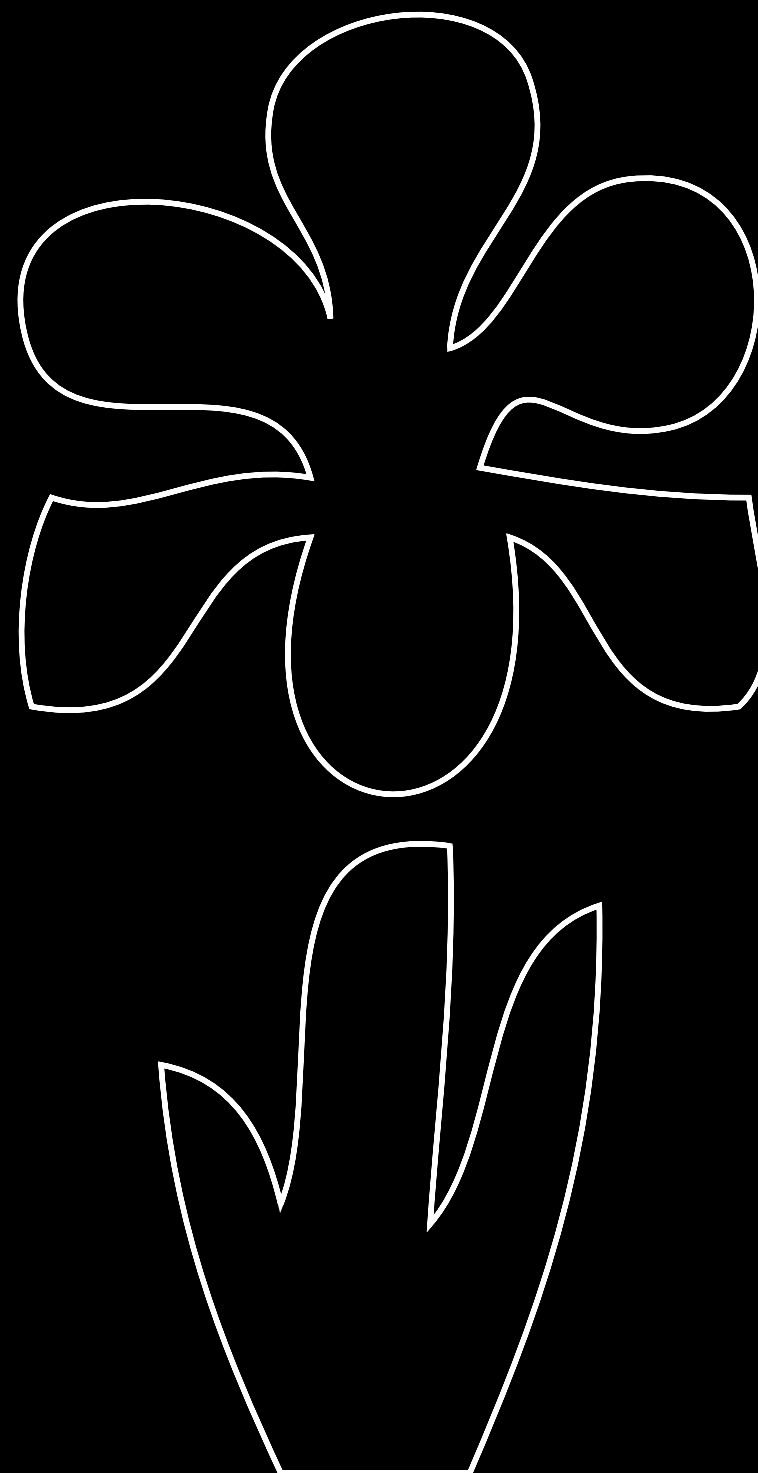

Brush Stroke



Brush Stroke Collection

Create a Linear Look.
a stroke of genius meets design.

Brush Stroke Collection



12 x 24
IRG1224057

Oyster Stroke



12 x 24
IRG1224056



12 x 12
IRG1212056

Nickel Stroke



Nickel Stroke



Brush Stroke Mosaics




Muretto Mosaic

random mesh mounted on 12 x 12 sheet



Lines 01 Mosaic

1 x 12 mesh mounted on 12 x 12 sheet



Brick 01 Mosaic

1 x 2 mesh mounted on 12 x 12 sheet

Oyster Stroke

IRG12M5057

IRG12ML157

IRG12MB157

Nickel Stroke

IRG12M5056

IRG12ML156

IRG12MB156

Brush Stroke Trim



Liner

1/2 x 24

IRG0524L57

IRG0524L56



Bullnose

6 x 24

IRG624BT57

IRG624BT56



Cove Base

6 x 12

IRG612C057

IRG612C056

Oyster Stroke

Nickel Stroke



Nickel Stroke









Oyster Stroke

C1028
COF
Dry ≥ 0.80
Wet ≥ 0.60

Acutest
DCOF
Wet ≥ 0.42

Brush Stroke Tech Specs

PHYSICAL PROPERTIES	TEST	INDUSTRY STANDARDS		IRIS US RESULTS COLORED BODY
Water Absorbtion	ASTM C373	0.5% Maximum		≤ 0.1%
Size				
Calibrated (non rectified)	ASTM C499	• Range of Thickness (inch)	0.040	≤ 0.040
	ASTM C499	• Average Facial Dimension	± 0.50%	≤ ± 0.50%
	ASTM C485	• Warpage	± 75% on any edge	≤ ± 0.75%
	ASTM C485	• Warpage	± 50% on diagonal	≤ ± 0.50%
	ASTM C502	• Wedging	± 0.50%	≤ ± 0.50%
Rectified	ASTM C499	• Range of Thickness (inch)	0.040	≤ 0.040
	ASTM C499	• Average Facial Dimension	± 0.25%	≤ 0.25%
	ASTM C485	• Warpage	± 0.40% on any edge	≤ 0.40%
	ASTM C485	• Warpage	± 0.40% on diagonal	≤ 0.40%
	ASTM C502	• Wedging	± 0.25%	≤ 0.25%
Bond Strength	ASTM C482	50 psi or greater		> 200 psi
Deep Abrasion	ASTM C1243	< 175 mm ³		< 150 mm ³
Hardness (Mohs scale)		No requirement		≥ 7
Frost Resistance (Freeze/Thaw)	ASTM C1026	No sample must show alterations to surface		No cracking or spalling occurred
Chemical Resistance	ASTM C650	No requirement		Class A
Breaking Strength	ASTM C648	250 lbf or greater		≥ 350 lbf
Coefficient of Friction (static)	ASTM C1028	No requirement		Per collection

Data taken from a representative colored body collection. Individual product testing can be conducted by request.

Coefficient of Friction: All values given are for matte or honed material. No values are given for polished material. Iris U.S. does not recommend polished surfaces in areas subject to exposure from grease, oil or water. (All values are based on ASTM C1028 and Acutest DCOF.)

Brush Stroke Packaging

PRODUCT	SIZE	BOX PIECES	BOX SF	PALLET BOXES	PALLET SF	THICKNESS	WEIGHT LB/SF
Floor & Wall Tile	12 x 24	8	15.751	32	504.032	8	3.55
	12 x 12	10	9.793	60	587.58	8	3.55
	6 x 24	16	15.585	40	623.4	8	3.55
Mosaics on 12 x 12 Sheet							LB PER PIECE
Muretto	12 x 12	4	3.917	-	-	8	3.55
Lines 01	1 x 12	5	4.896	-	-	8	3.55
Brick 01	1 x 2	5	4.896	-	-	8	3.55
Bullnose	6 x 24	16	15.585	-	-	8	3.55
Cove Base	6 x 12	8	3.88	-	-	8	1.70
Liner	1.5 x 12	4	-	-	-	8	.37