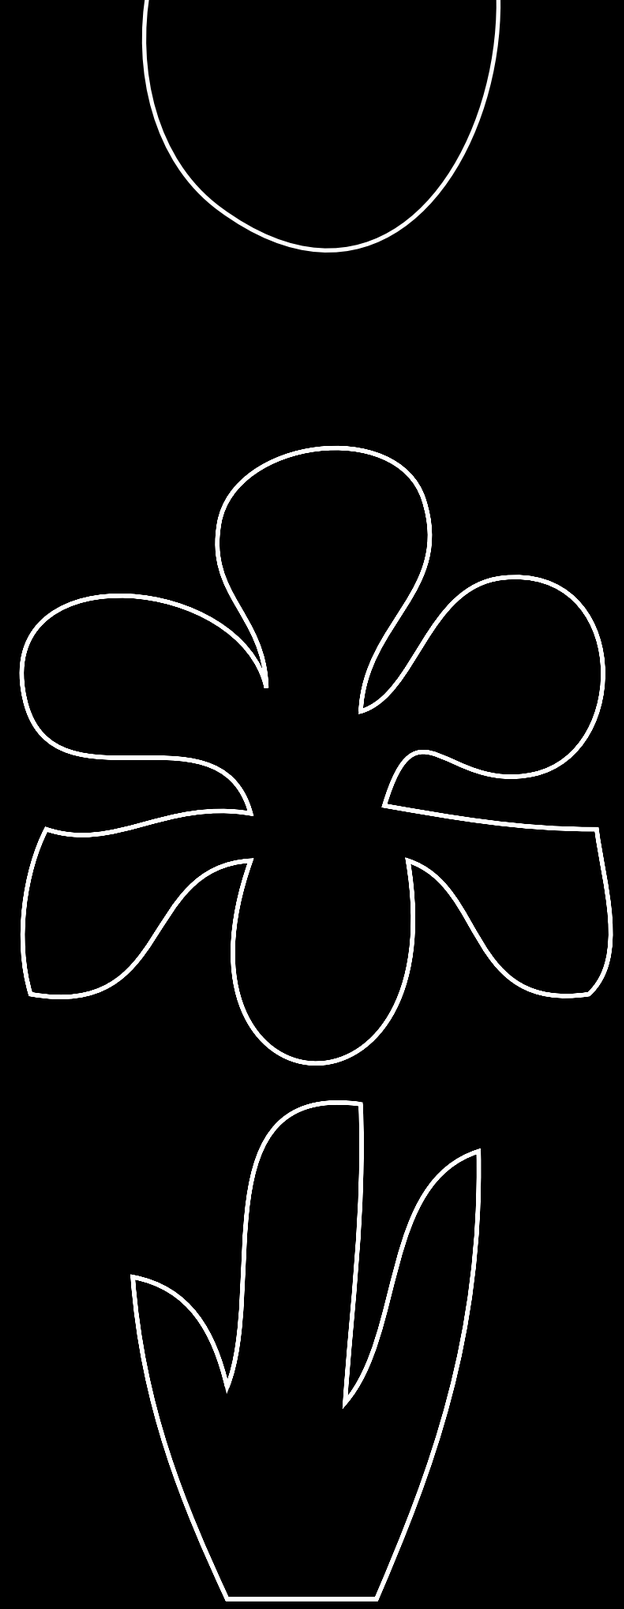

Travertini

Al Contro

Iris U.S. Customer Service
800.323.9906
www.irisus.com
USIRISTC13

Made in the USA

iris® U.S.

General Contractor: **William Frey Construction**
Design by: **Yoram Mimun B.M.A., Stone Age Tile, VP-Commercial Projects**

Argento Al Contro 24” x 48”

Argento Al Contro 24” x 48”

Travertini Al Contro Collection

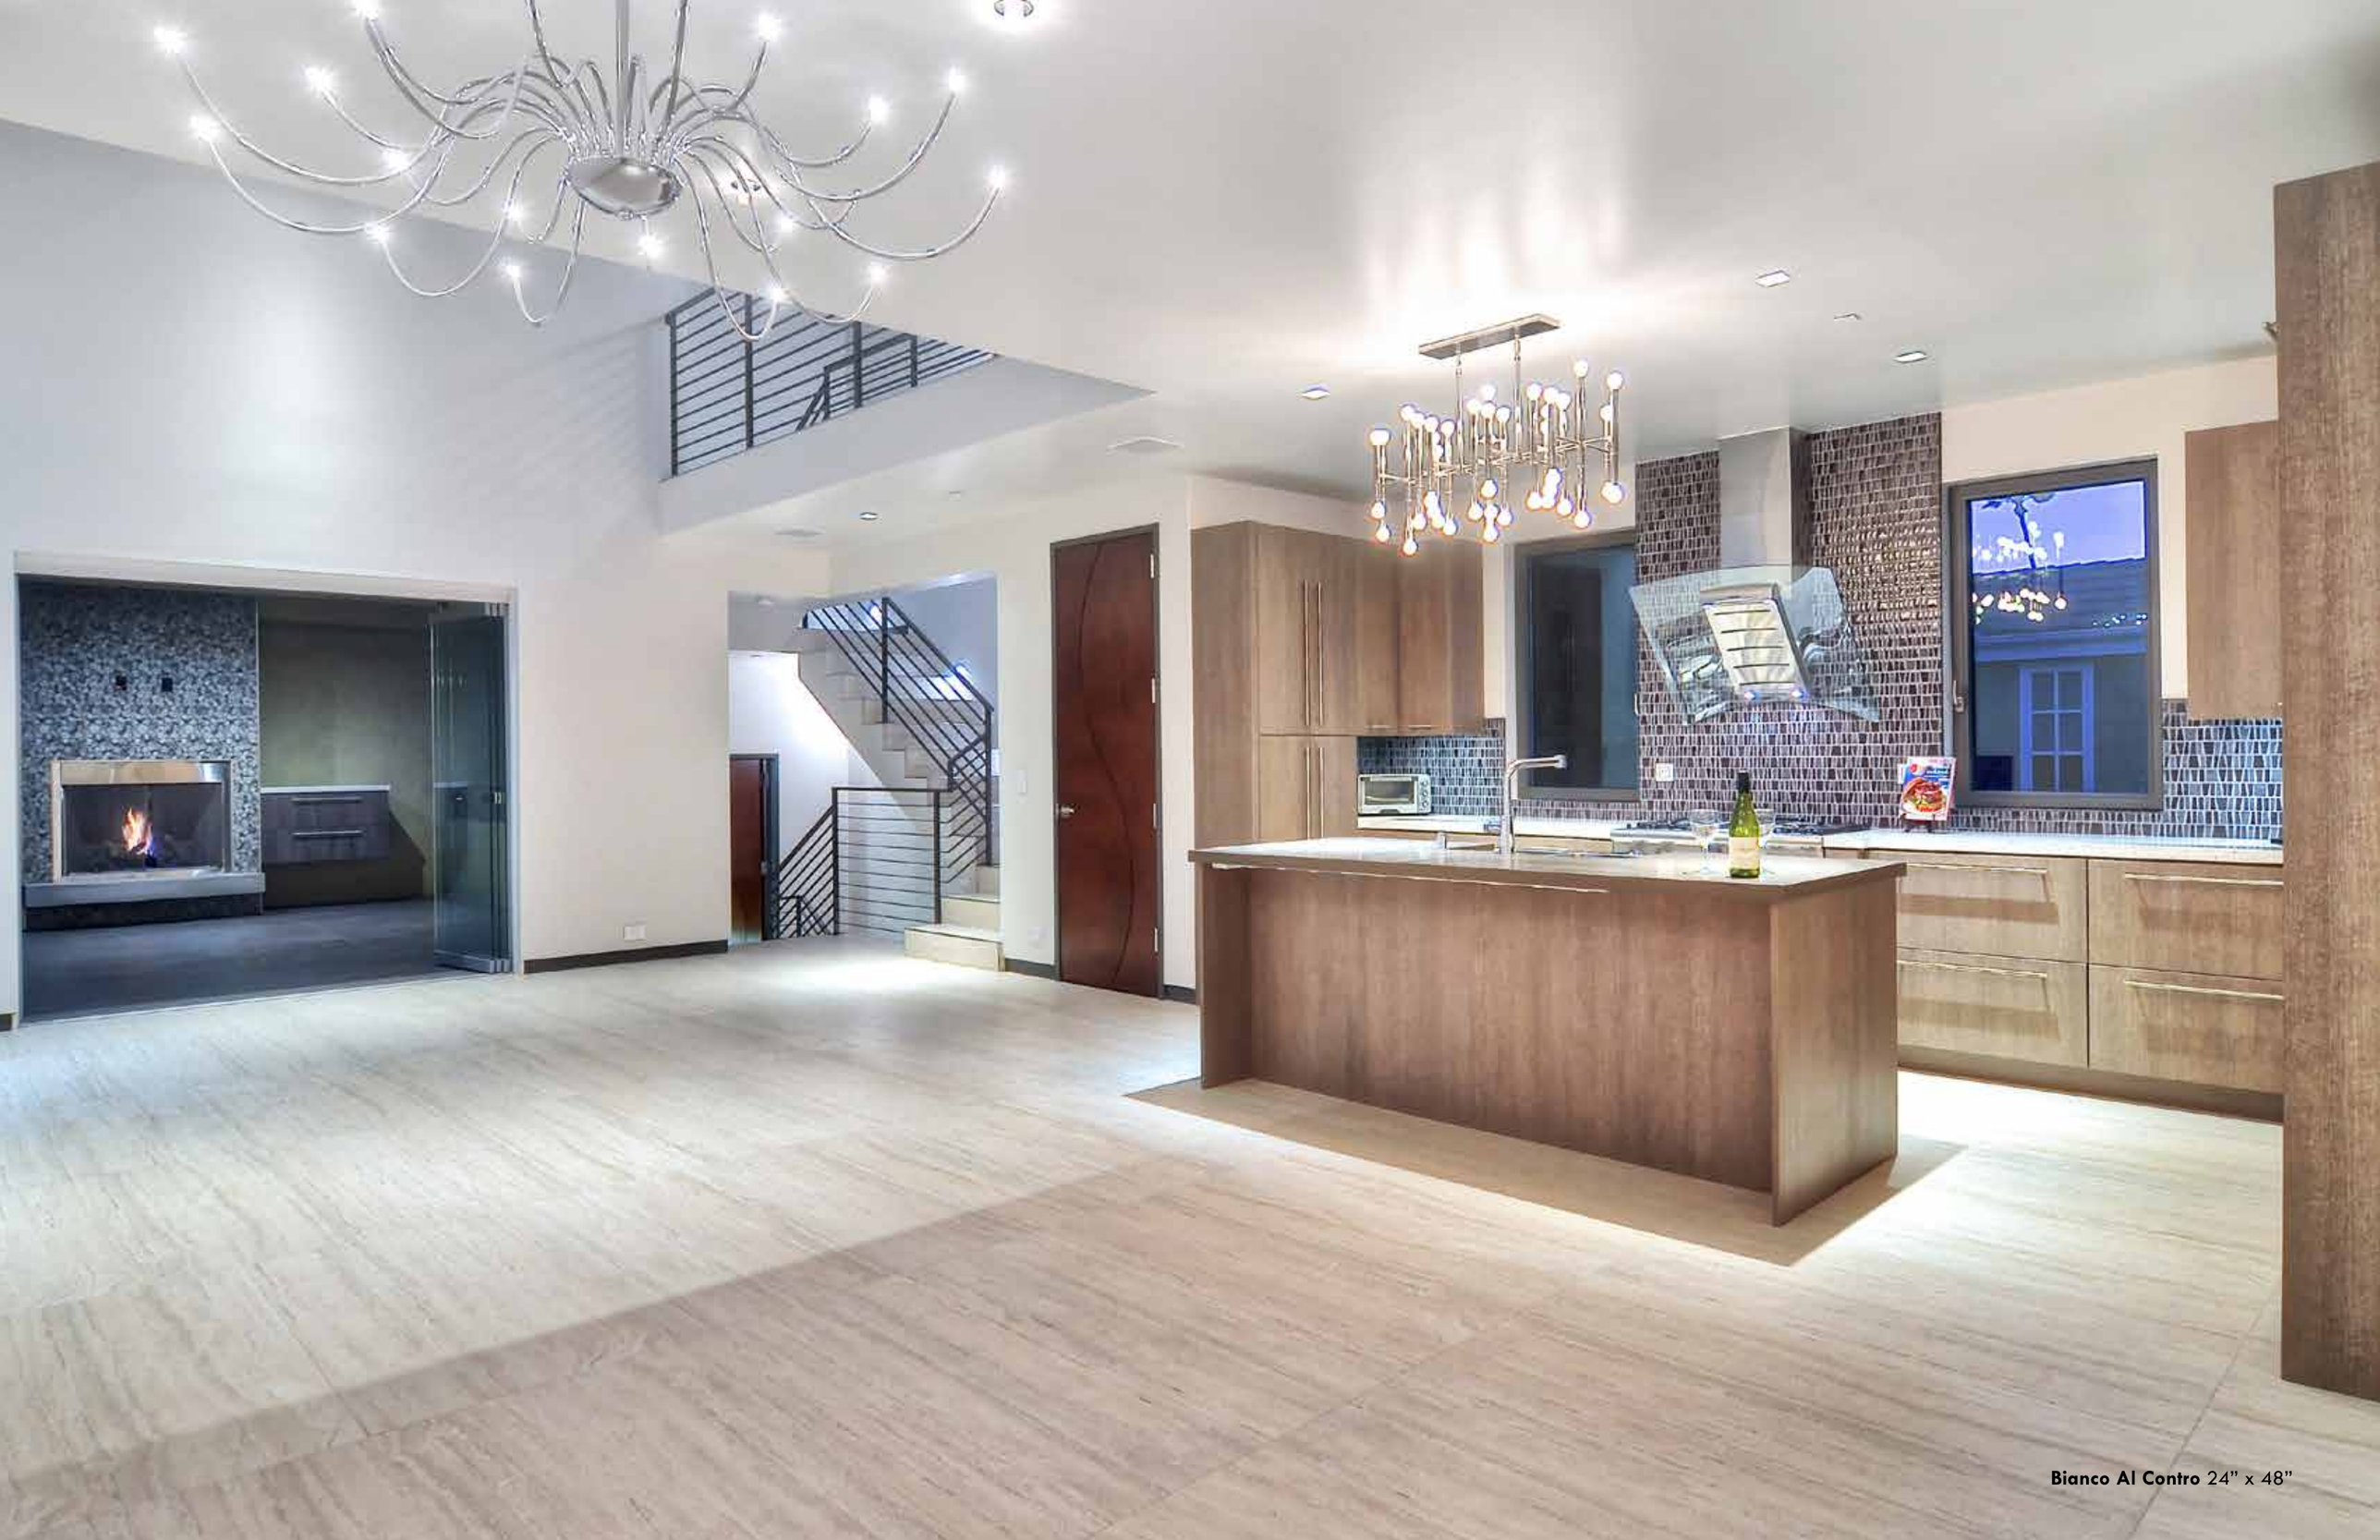

Bianco Al Contro 24” x 48”

Travertini Al Contro Collection

COLORED BODY MATERIAL · Rectified · V2 · GREEN CHOICE

Bianco Al Contro

Grigio Al Contro

Argento Al Contro

	24 x 48	12 x 24
Bianco Al Contro	IRG2448112	IRG1224112
Grigio Al Contro	IRG2448113	IRG1224113
Argento Al Contro	IRG2448114	IRG1224114

Mosaics & Trim



Mosaic

2 x 2 mesh mounted on 12 x 12 sheet

Brick 03 Mosaic

2 x 6 mesh mounted on 12 x 12 sheet

Bullnose

4 x 24

	Mosaic	Brick 03 Mosaic	Bullnose
Bianco Al Contro	IRG12M112P	IRG12MB3112	IRG424BT112
Grigio Al Contro	IRG12M113P	IRG12MB3113	IRG424BT113
Argento Al Contro	IRG12M114P	IRG12MB3114	IRG424BT114

Grigio Al Contro 24” x 48”

Argento Al Contro & Grigio Al Contro various sizes

C1028 COF		Acutest DCOF	
Dry	≥ 0.75	Wet	≥ 0.42
Wet	≥ 0.60		

Travertini Al Contro Tech Specs

PHYSICAL PROPERTIES	TEST	INDUSTRY STANDARDS		IRIS US RESULTS COLORED BODY
Water Absorbtion	ASTM C373	0.5% Maximum		≤ 0.1%
Size				
Calibrated (non rectified)	ASTM C499	• Range of Thickness (inch)	0.040	≤ 0.040
	ASTM C499	• Average Facial Dimension	± 0.50%	≤ ± 0.50%
	ASTM C485	• Warpage	± 75% on any edge	≤ ± 0.75%
	ASTM C485	• Warpage	± 50% on diagonal	≤ ± 0.50%
	ASTM C502	• Wedging	± 0.50%	≤ ± 0.50%
Rectified	ASTM C499	• Range of Thickness (inch)	0.040	≤ 0.040
	ASTM C499	• Average Facial Dimension	± 0.25%	≤ 0.25%
	ASTM C485	• Warpage	± 0.40% on any edge	≤ 0.40%
	ASTM C485	• Warpage	± 0.40% on diagonal	≤ 0.40%
	ASTM C502	• Wedging	± 0.25%	≤ 0.25%
Bond Strength	ASTM C482	50 psi or greater		> 200 psi
Deep Abrasion	ASTM C1243	< 175 mm^3		< 150 mm^3
Hardness (Mohs scale)		No requirement		≥ 7
Frost Resistance (Freeze/Thaw)	ASTM C1026	No sample must show alterations to surface		No cracking or spalling occurred
Chemical Resistance	ASTM C650	No requirement		Class A
Breaking Strength	ASTM C648	250 lbf or greater		≥ 350 lbf
Coefficient of Friction (static)	ASTM C1028	No requirement		Per collection

Data taken from a representative colored body collection. Individual product testing can be conducted by request.

Coefficient of Friction: All values given are for matte or honed material. No values are given for polished material. Iris U.S. does not recommend polished surfaces in areas subject to exposure from grease, oil or water. (All values are based on ASTM C1028 and Acutest DCOF.)

Travertini Al Contro Packaging

PRODUCT	SIZE	BOX PIECES	BOX SF	PALLET BOXES	PALLET SF	THICKNESS	WEIGHT LB/SF
Floor & Wall Tile	24 x 48	4	31.668	20	633.36	8	3.83
	12 x 24	8	15.751	32	504.03	8	3.55
							LB PER PIECE
Mosaics 12 x 12 Sheet	2 x 6	5	4.896	-	-	8	3.55
	2 x 2	5	4.896	-	-	8	3.55
Bullnose	4 x 24	16	10.39	-	-	8	2.00