
FABBRICA MARMI E GRANITI

120"X 60"



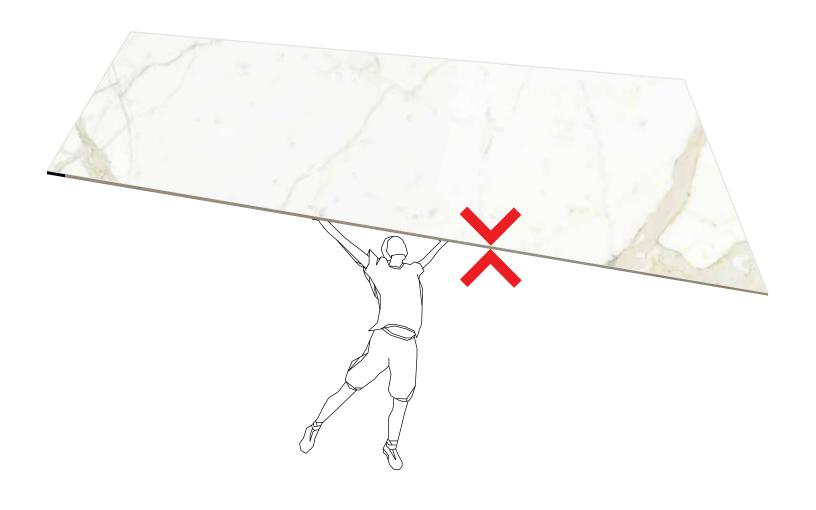


/ Index

Size Range	/ 03
Applications	/ 05
Color Range	/ 34
Bookmatches	/ 38
Sizes Available	/ 42
Limitations & Responsibilities	/ 50
General Instructions	/ 51
Packaging	/ 68
Technical Specifications	/ 69

1



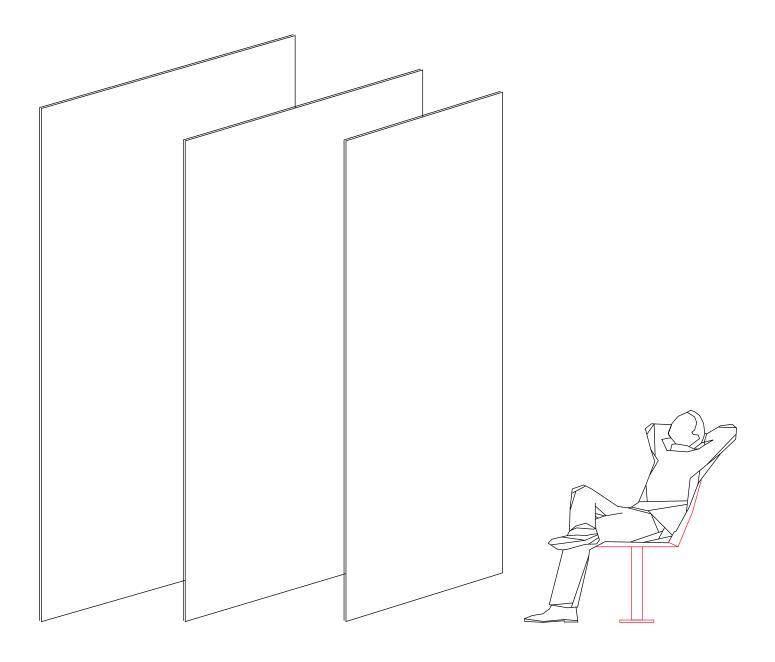

128" x 64" *

120" x 60"


128" x 40"


*Available upon request.


THE SIZE AND SHAPE YOU NEED





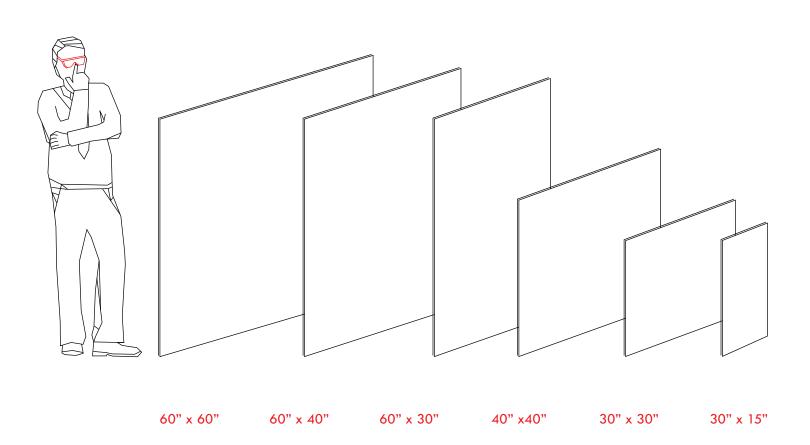


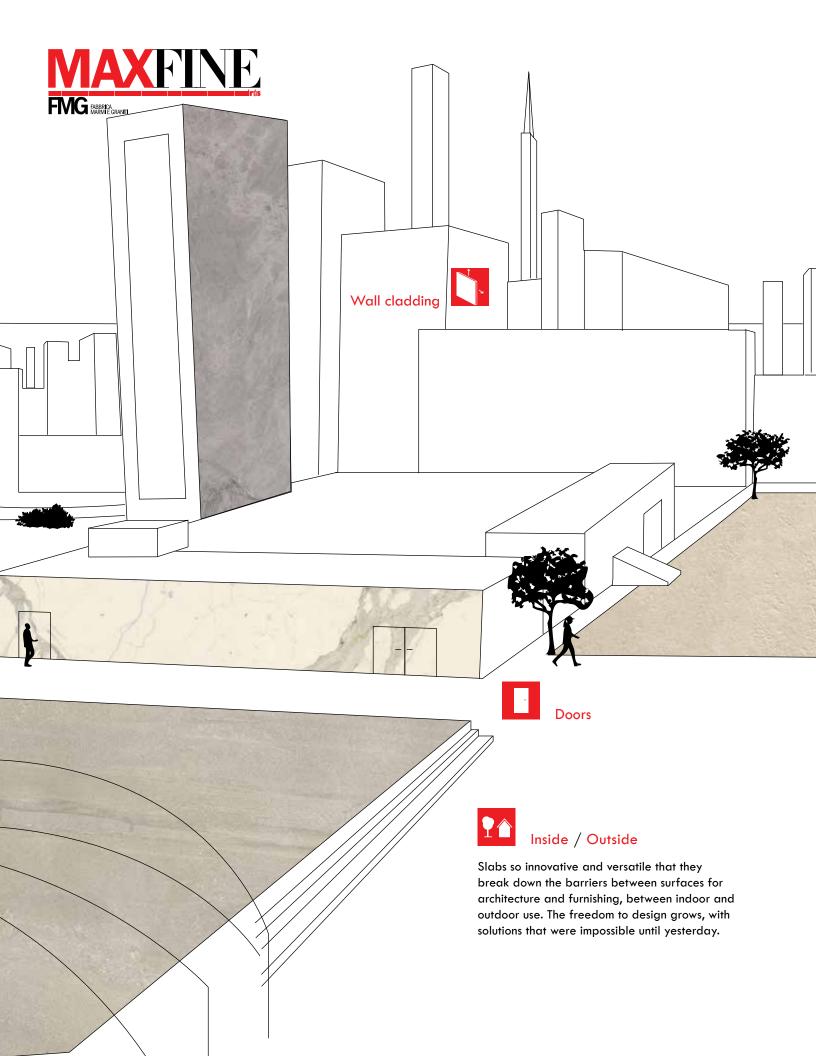

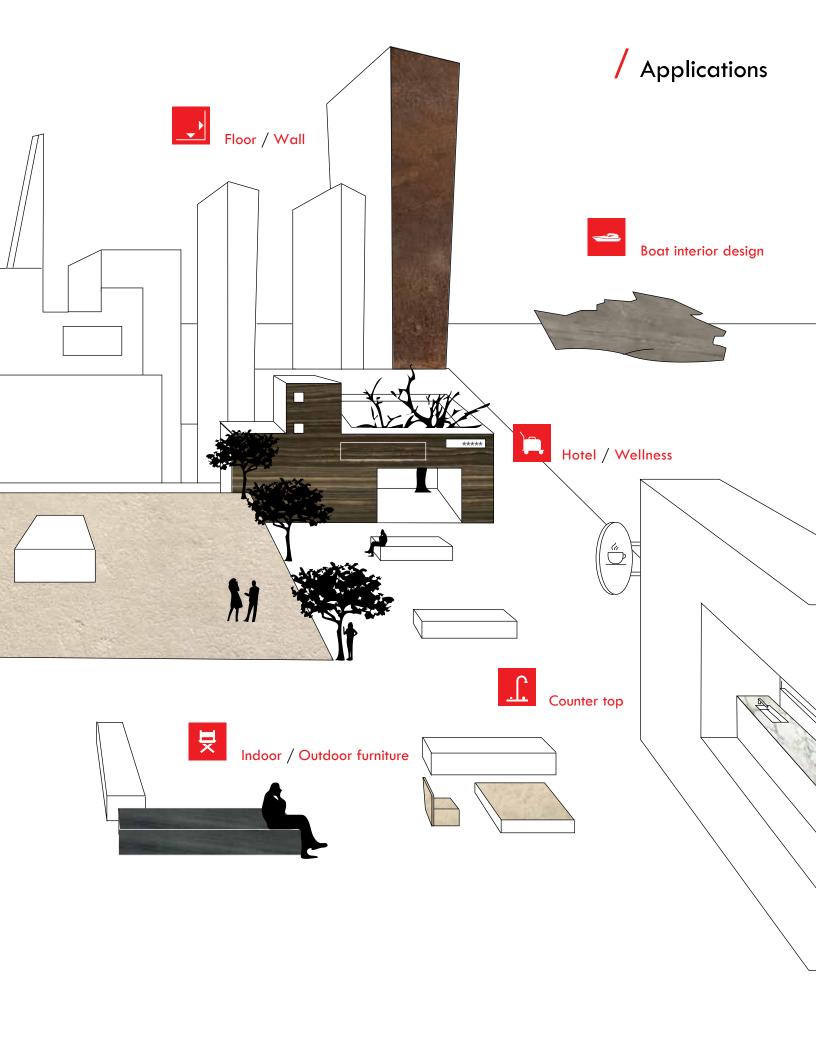







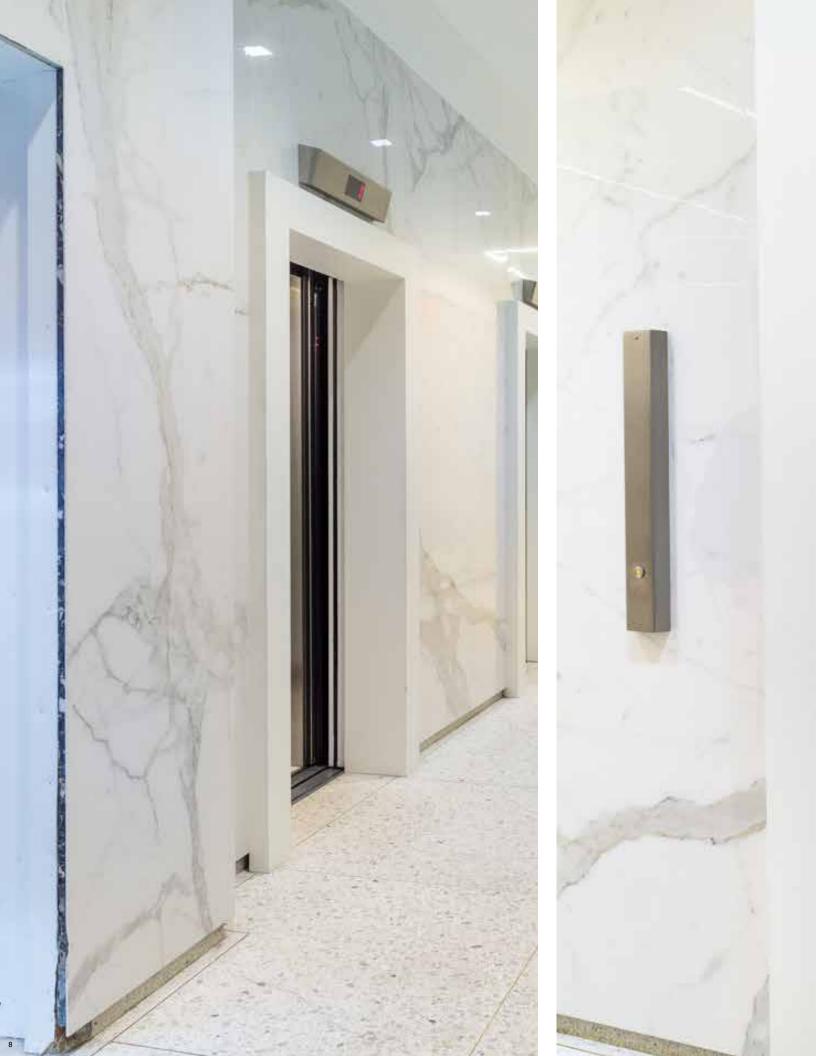





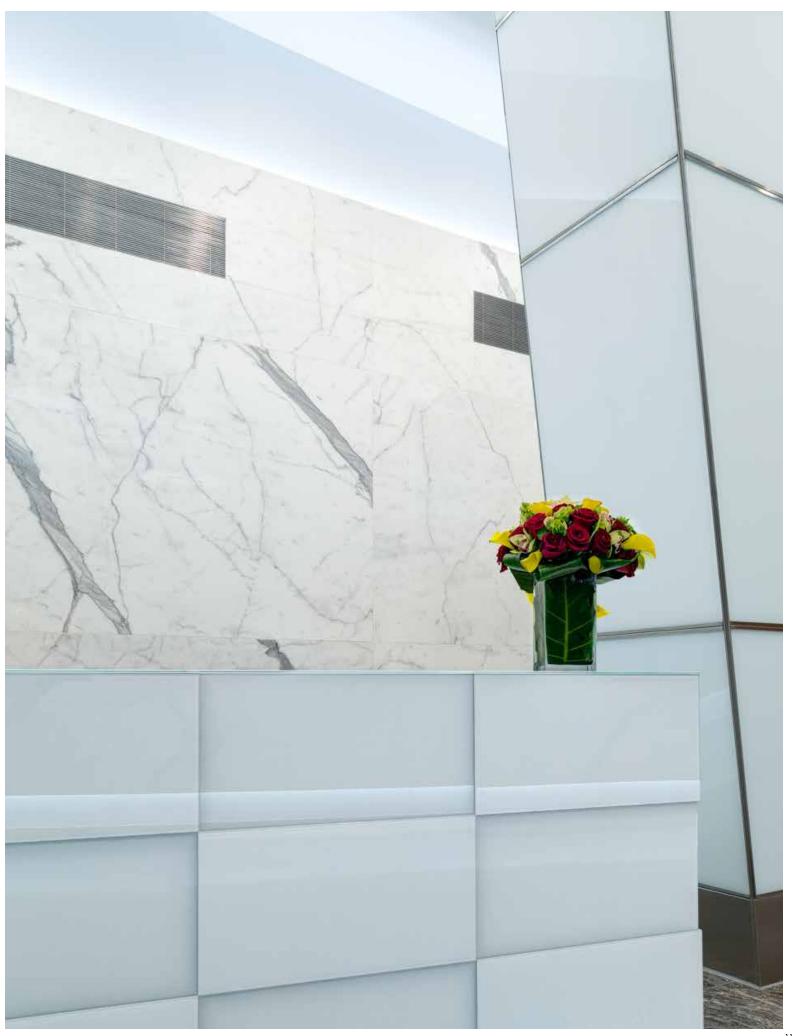

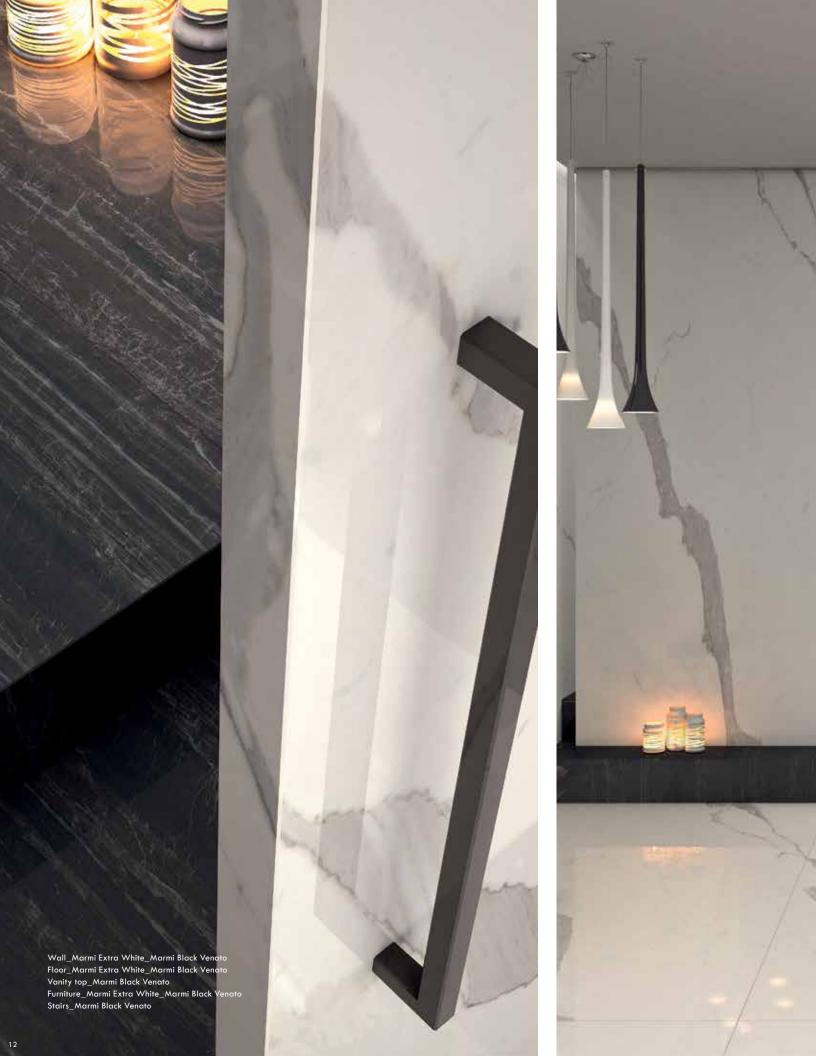





















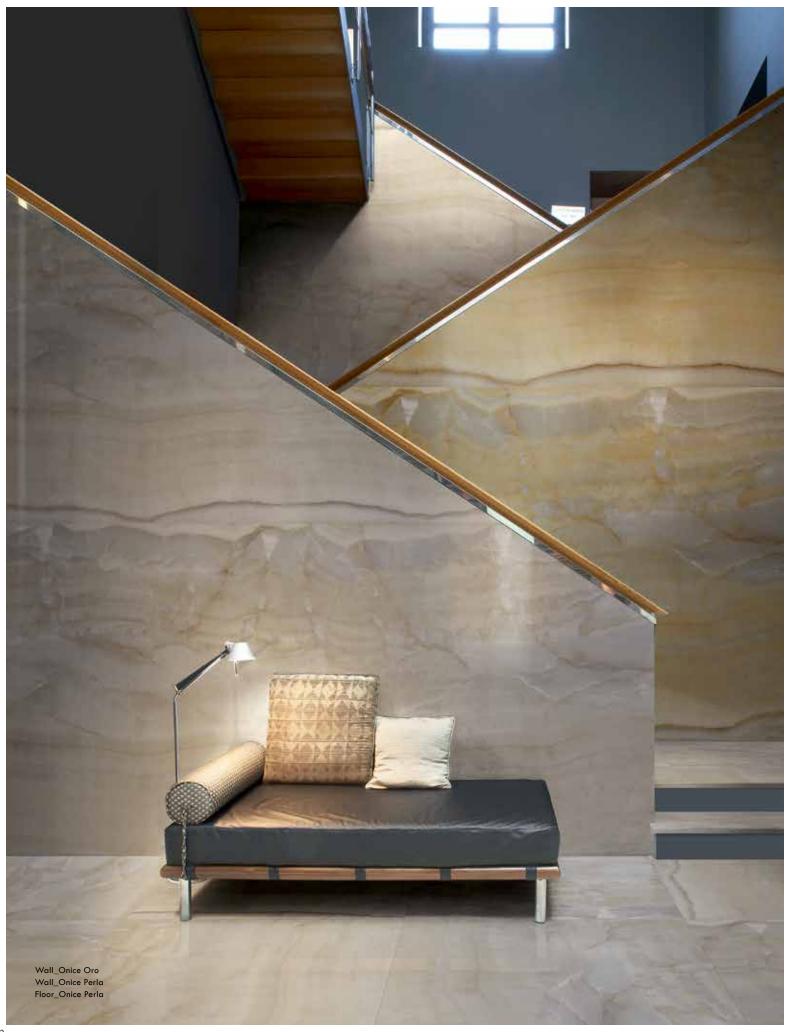

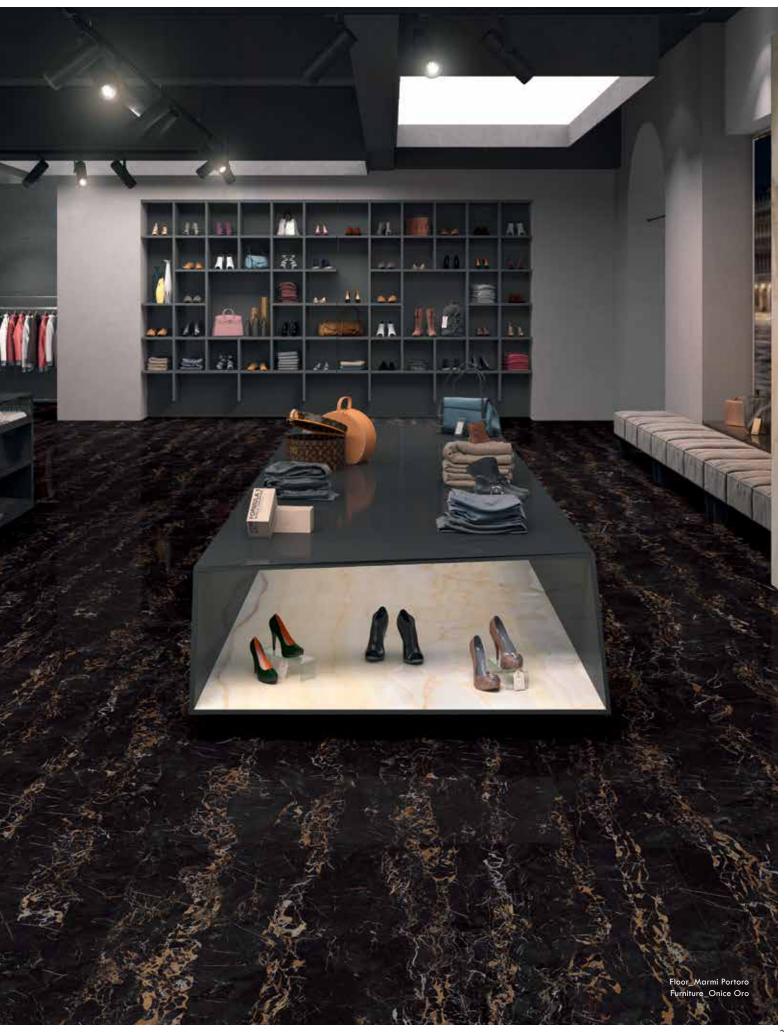











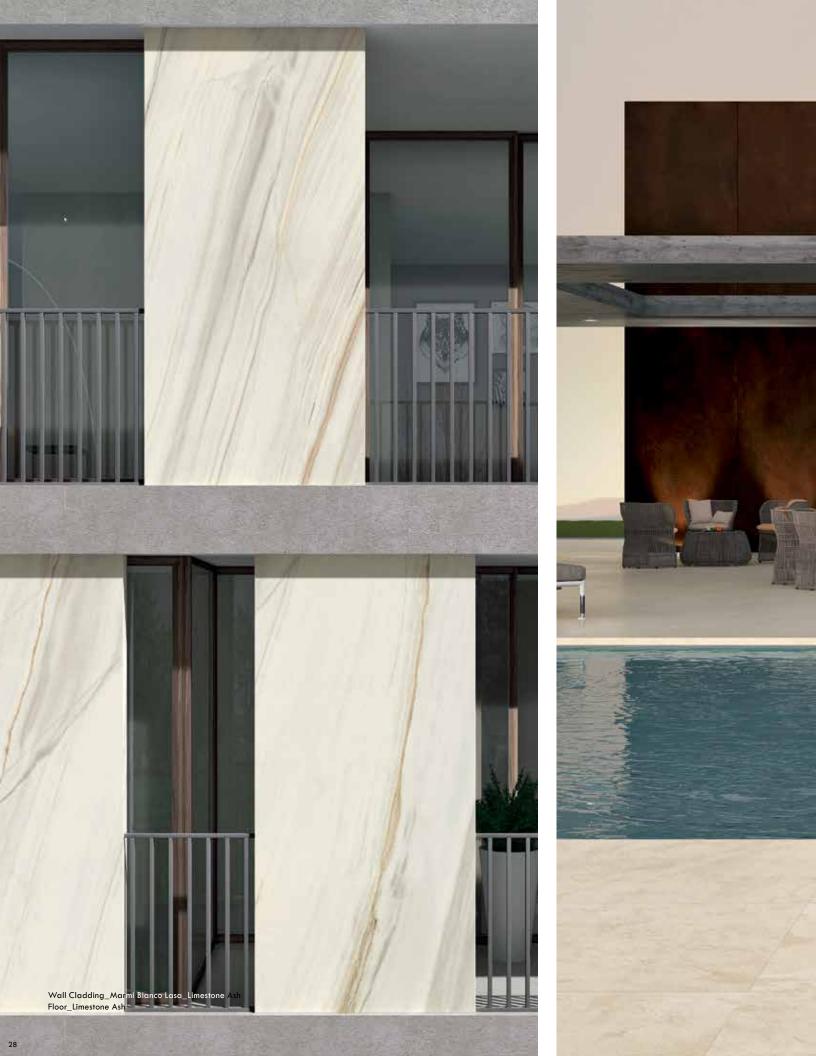



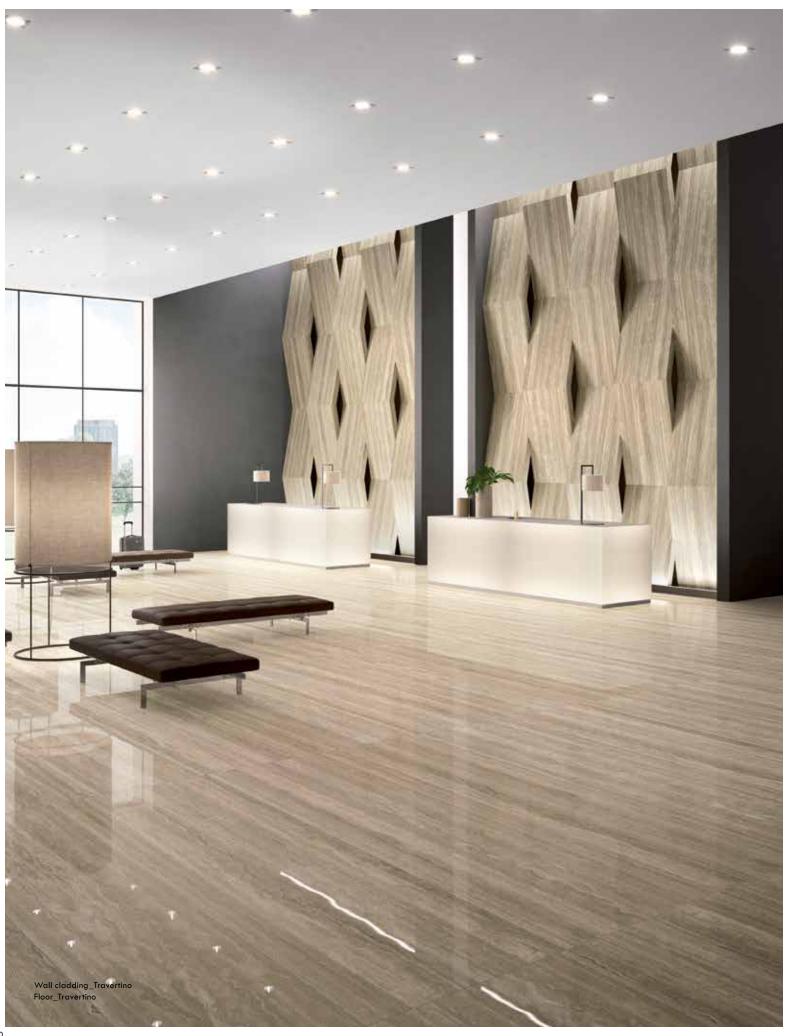










Marble inspiration

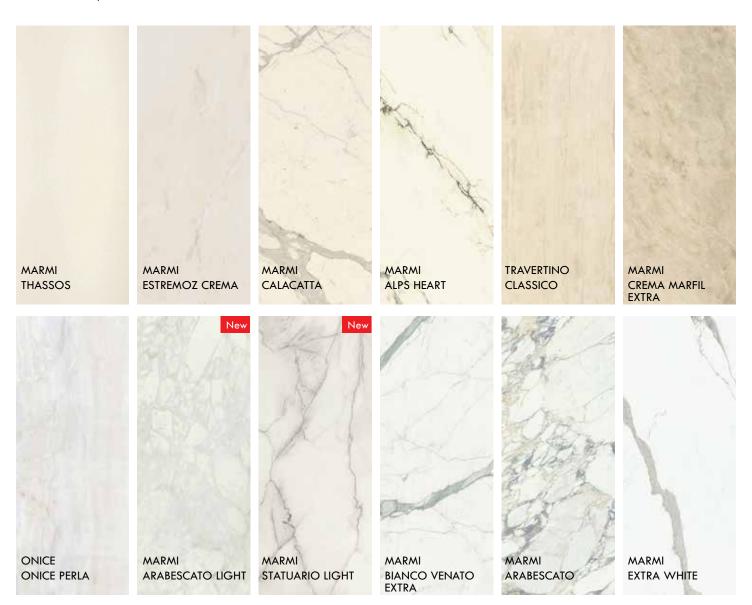

MAXFINE offers a very rich variety of textural effects so as to always find the right uncompromising inspiration.

Each material is a prototype of beauty: marble, onyx, metal, stone, wood, and concrete.






Stone inspiration



Large-size slabs and modular formats for any flooring or wall, but also for dressing a design. With **MAXFINE** everything can be made: from the walls of a skyscraper to a garden table.







B


Bianco Venato Extra Bookmatch



A



Extra White Bookmatch

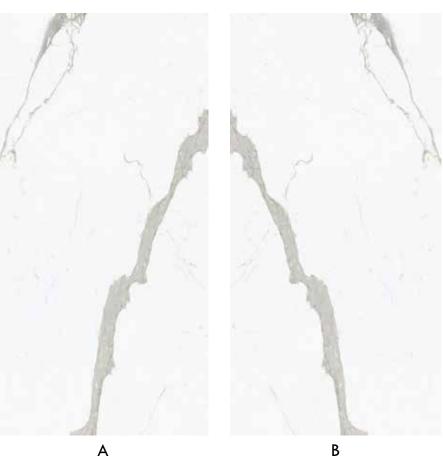

















Marble inspiration ★ 6 MM

128" x 64"

120" x 60"

120" x 40"

60" x 60"

	.20	X • 1	120 X 00	120 X 10	
MARMI STATUARIO LIGHT	*		L315334MF6	-	L150334MF6
MARMI ARABESCATO LIGHT	LU *		L315333MF6	-	L150333MF6
	LU *		L315336MF6	-	L150336MF6
MARMI GAUDI STONE	PL *		P315336MF6	-	P150336MF6
	LU *		L315335MF6	-	L150335MF6
MARMI STONE GREY	PL *		P315335MF6	-	P150335MF6
MARMI PORTORO	<u>LU</u> *		L315337MF6	-	L150337MF6
	LU *		L315316MF6	-	L150316MF6
MARMI ESTREMOZ CREMA	PL *		P315316MF6	-	P150316MF6
	LU *		L315265MF6	L310265MF6	L150265MF6
MARMI CALACATTA	PL *		P315265MF6	P310265MF6	P150265MF6
18 8	LU *		L315268MF6	-	-
MARMI CALACATTA BLOCK-A	PL *		P315268MF6	-	-
AND X	LU *		L315267MF6	-	-
MARMI CALACATTA BLOCK-B	PL *		P315267MF6	-	-
The state of	LU *	:	L31 <i>5</i> 297MF6	-	L150297M F6
MARMI ALPS HEART	PL *		P315297MF6	-	P150297MF6
	LU *		L315298MF6	L310298MF6	L150298MF6
MARMI CREMA MARFIL EXTRA	PL *		P315298MF6	P310298MF6	P150298MF6
MARMI ERAMOSA	LU *		L315315MF6	-	L150315MF6
	LU *		L315189MF6	L310189MF6	L150189MF6
MARMI THASSOS	PL *		P315189MF6	P310189MF6	P150189MF6
	LU *		L315326MF6	-	L150326MF6
MARMI BIANCO LASA	PL *		P315326MF6	-	P150326MF6



^{*} Available upon request.

/ Sizes Available


60" x 40"	60" x 30"	40" x 40"	30" x 30"	30" x 15"
-	L175334MF6	-	L75334MF6	L737334MF6
-	L175333MF6	-	L75333MF6	L737333MF6
-	L175336MF6	-	L75336MF6	L737336MF6
-	P175336MF6	-	P75336MF6	P737336MF6
-	L175335MF6	-	L75335MF6	L737335MF6
-	P175335MF6	-	P75335MF6	P737335MF6
-	L175337MF6	-	L75337MF6	L737337MF6
-	L175316MF6	-	L75316MF6	L737316MF6
-	P175316MF6	-	P75316MF6	P737316MF6
L1510265MF6	L175265MF6	L100265MF6	L75265MF6	L737265MF6
P1510265MF6	P175265MF6	P100265MF6	P75265MF6	P737265MF6
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	L175297MF6	-	L75297MF6	L737297MF6
-	P175297MF6	<u>-</u>	P75297MF6	P737297MF6
L1510298MF6	L175298MF6	L100298MF6	L75298MF6	L737298MF6
P1510298MF6	P175298MF6	P100298MF6	P75298MF6	P737298MF6
-	L175315MF6	-	-	-
L1510189MF6	L175189MF6	L100189MF6	L75189MF6	L737189MF6
P1510189MF6	P175189MF6	P100189MF6	P75189MF6	P737189MF6
-	L175326MF6	-	L75326MF6	L737326MF6
-	P175326MF6	-	P75326MF6	P737326MF6

Available upon request.











M	ar	h	e inspiration
	w	~	l C IIISDII GIIOII

	0	MM
$\overline{}$	O	IVIIVI

					*
1	2	01		4	477
- 1		റ	х	(C) 4	4

Marble inspiration $\stackrel{\star}{\sim} 6 \text{N}$	1M	128" x 64" [*]	120" x 60"	120" x 40"	60" x 60"	
SCHOOL STATE	LU	*	L315300MF6	-	L150300MF6	
MARMI BIANCO VENATO EXTRA	PL	*	P315300MF6	-	P150300MF6	
	LU	*	L315301MF6	-	-	
MARMI BIANCO VENATO EXTRA BLOCK-A	PL	*	P315301MF6	-	-	
Y T	LU	*	L315302MF6	-	-	
MARMI BIANCO VENATO EXTRA BLOCK-B	PL	*	P315302MF6	-	-	
Cham - IN	LU	*	-	-	L150320MF6	
MARMI ARABESCATO	PL PL	*	-	-	P150320MF6	
1	LU	*	L315320MF6A	- -	-	
MARMI ARABESCATO BLOCK-A	PL	*	P315320MF6A	-	-	
7.13	LU	*	L315320MF6B	-	-	
MARMI ARABESCATO BLOCK-B	PL	*	P315320MF6B	- -	-	
	LU	*	L315317MF6	-	L150317MF6	
MARMI EXTRA WHITE	PL	*	P315317MF6	-	P150317MF6	
	LU	*	L315318MF6	-	-	
MARMI EXTRA WHITE BLOCK-A	PL	*	P315318MF6	- -	-	
	LU	*	L315319MF6	-	-	
MARMI EXTRA WHITE BLOCK-B	PL	*	P315319MF6	-	-	
	LU	*	L315327MF6	-	L150327MF6	
MARMI BLUE DE SAVOIE	PL	*	P315327MF6	- -	P150327MF6	
MARMI BLACK VENATO	LU	*	L315314MF6	-	L150314MF6	
	LU	*	L315290MF6	-	L150290MF6	
ONICE PERLA	PL	*	P315290MF6	-	P150290MF6	
	LU	*	L315289MF6	-	L150289MF6	
ONICE ORO	PL	*	P315289MF6	-	P150289MF6	
	LU	*	L315328MF6	-	L150328MF6	
TRAVERTINO CLASSICO	PL	*	P315328MF6	-	P150328MF6	
	LU	*	L315288MF6	-	L150288MF6	
TRAVERTINO	PL	*	P315288MF6	-	P150288MF6	

^{*} Available upon request.



/ Sizes Available

60" x 40"	60" x 30"	40" x 40"	30" x 30"	30" x 15"
-	L175300MF6	-	L75300MF6	L737300MF6
-	P175300MF6	-	P75300MF6	P737300MF6
-	<u>-</u>	-	<u>-</u>	<u>-</u>
-	-	-	<u>-</u>	-
-	-	-	-	-
-	<u>-</u>	-	<u>-</u>	<u>-</u>
-	L175320MF6	-	L75320MF6	L737320MF6
-	P175320MF6	-	P75320MF6	P737320MF6
-	-	-	-	-
-	-	-	-	-
-	-	-	<u>-</u>	
-	-	-	-	-
-	L175317MF6	-	L75317MF6	L737317MF6
-	P175317MF6	-	P75317MF6	P737317MF6
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	L175327MF6	-	L75327MF6	L737327MF6
-	P175327MF6	-	P75327MF6	P737327MF6
-	L175314MF6	-	L75314MF6	L737314MF6
-	L175290MF6	-	L75290MF6	L737290MF6
-	P175290MF6	-	P75290MF6	P737290MF6
-	L175289MF6	-	L75289MF6	L737289MF6
-	P175289MF6	-	P75289MF6	P737289MF6
-	L175328MF6	-	L75328MF6	L737328MF6
-	P175328MF6	-	P75328MF6	P737328MF6
-	L175288MF6	-	L75288MF6	L737288MF6
-	P175288MF6	-	P75288MF6	P737288MF6

^{*} Available upon request.











Cement inspiration

	6	MM
$\overline{}$	O	IVIIVI

120"	х	6	0	,
------	---	---	---	---

120" x 40"

60" x 60"

		.=000			
ROADS WHITE PURITY	N	P315197MF6	P310197MF6	P150197MF6	
ROADS SAND HEARTH	N	P315198MF6	P310198MF6	P150198MF6	
ROADS COFFEE TRUTH	N	P315199MF6	P310199MF6	P150199MF6	
ROADS PEARL MIND	N	P315200MF6	-	P150200MF6	
ROADS GREY CALM	N	P315201MF6	P310201MF6	P150201MF6	
ROADS DARK DEPTH	N	P315202MF6	P310202MF6	P150202MF6	
	LU	L315240MF6	L310240MF6	L150240MF6	
CHROMOCODE 3D TITANIUM WHITE	N	P315240MF6	P310240MF6	P150240MF6	
	LU	L315247MF6	L310247MF6	L150247MF6	
CHROMOCODE 3D IVORY BLACK	N	P315247MF6	P310247MF6	P150247MF6	




^{*} Available upon request.

/ Sizes Available

	60" x 40"	60" x 30"	40" x 40"	30" x 30"	30" x 15"
F	P1510197MF6	P175197MF6	P100197MF6	P75197MF6	P737197MF6
F	P1510198MF6	P175198MF6	P100198MF6	P75198MF6	P737198MF6
F	P1510199MF6	P175199MF6	P100199MF6	P75199MF6	P737199MF6
	-	P175200MF6	-	P75200MF6	P737200MF6
F	P1510201MF6	P175201MF6	P100201MF6	P75201MF6	P737201MF6
F	P1510202MF6	P175202MF6	P100202MF6	P75202MF6	P737202MF6
l	.1510240MF6	L175240MF6	L100240MF6	L757240MF6	L737240MF6
F	P1510240MF6	P175240MF6	P100240MF6	P757240MF6	P737240MF6
l	.1510247MF6	L175247MF6	L100247MF6	L757247MF6	L737247MF6
F	P1510247MF6	P175247MF6	P100247MF6	P757247MF6	P737247MF6



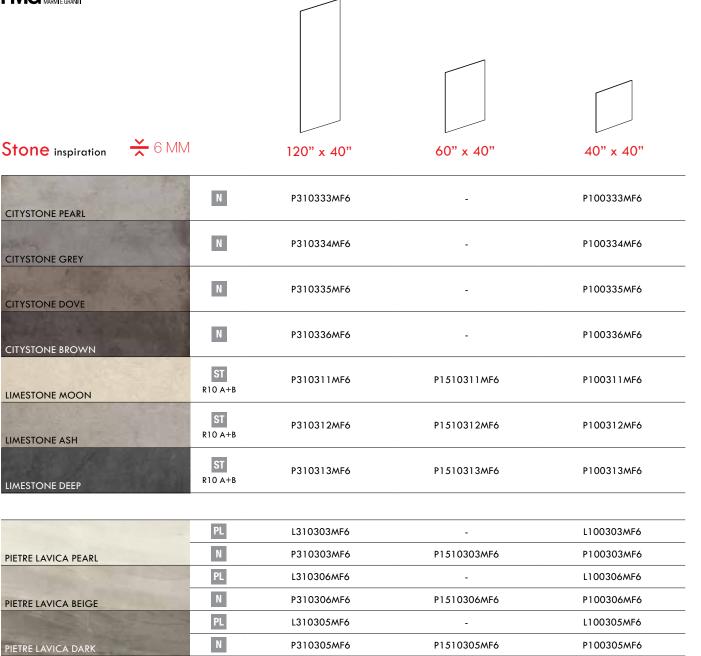

L310304MF6

P310304MF6

L310307MF6

P310307MF6

N

PL



P1510304MF6

P1510307MF6

L100304MF6

P100304MF6

L100307MF6


P100307MF6


PIETRE LAVICA GREY

PIETRE LAVICA BLACK

^{*} Available upon request.

/ Sizes Available

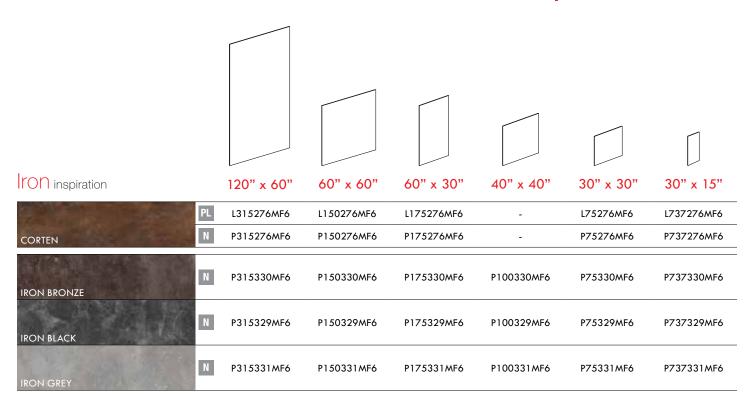

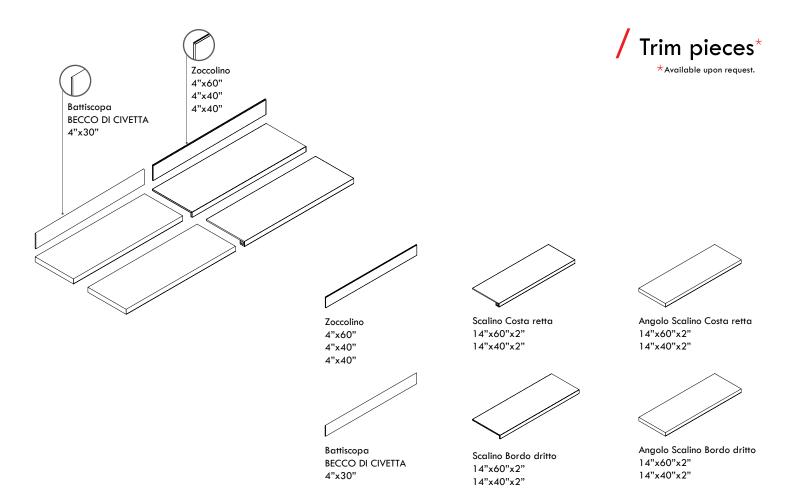



Limitations & Responsibilities

We have taken every care to provide complete information in this document; this information should be used as a guide in the design, installation and care of MAXFINE IRIS FMG large porcelain panels. No warranty however implied or expressed, is given in relation to the procedures outlined in this technical information guide except that is required by industry standards.

MAXFINE IRIS FMG / IRIS U.S. assumes that the designers, fabricators and installers using our large porcelain panels are familiar with all aspects outlined in the information provided, and strictly adhere to the recommendations and specifications described herein and by ANSI industry standards. Any deviation from the recommended guidelines may result in the products not performing as expected, and may result in the warranty becoming null and void. Though every care and precaution has been taken in the preparation of this document, MAXFINE IRIS FMG / IRIS U.S. assumes no responsibility for errors and/or omissions, or for the damages resulting from the use of instruction contained in the information hereby provided.

MAXFINE IRIS FMG / IRIS U.S. shall not be liable for any loss of profit or any other loss or damage caused or alleged to have been caused either directly or indirectly as a result of any person solely relying upon any information contained in this manual.

MAXFINE IRIS FMG / IRIS U.S. reserves the right to change or modify this manual or its electronic version from time to time without notice. It is the responsibility of the consumer to consult or contact MAXFINE IRIS FMG / IRIS U.S. for the latest version or updates.



/ General Instructions

Shipping	/ 52
Handling	/ 54
Tools Needed	/ 56
Manipulation Full Cuts, Cut Outs, & Mitered Edges	/ 57
Floor / Wall Installation	/ 60
Exterior Installation	/ 61
Countertop Fabrications	/ 61
Cleaning & Maintenance	/ 62
Recommended Cleaners	/ 62
Recommended Installation Accessories Tools Blades / Bits Building Products / Backerboards Adhesives (Colored Epoxy, Glue, etc.) Setting Materials (Thin Set, Grout, etc.) Trowels	/ 63
Factory Certified Training (F.A.C.T.)	/ 66
Quality Assurance	/ 67

51



PRODUCT IDENTIFICATION

- Each full crate will include a product sticker with the product description, shade, size, and code, along with a packing slip for details of shipment and material.
- All smaller shipments will only include the packing slip. If
 a special shade is needed, please indicate it on the purchase
 order. When ordering the same material multiple times, the
 same (original) shade cannot be guaranteed.



FOR ALL PANELS FROM 120" X 60" & 60" X 60", VERTICAL TRANSPORTATION IS PREFERRED BY USING A-FRAME PACKAGING:

- A-frame packaging can hold up to 50 pieces of 5'x10' porcelain panels vertically.
- Full 20 ft. containers hold 150 pieces (3 total A-frames).





OTHER SIZE PACKAGING:

• 15"x30", 30"x30", and 30"x60" are regularly packaged in a box and shipped in wood crates. 60"x60" are shipped flat in reinforced crates, holding 24 pieces per crate, or on a vertical A-frame holding up to 48 pieces.

WHEN TAKING DELIVERY OF LARGE PORCELAIN PANELS 120" X 60" & 60" X 60" PLEASE NOTE THE FOLLOWING:

- It is important to examine any shipment to notate any damage on BOL or a claim may be refused.
- If you detect any defect after taking delivery of the panels, and prior to cutting, do not proceed with the processing. Call your customer service or sales representative immediately.



We do not recommend using the same A-frame to ship with as that received from the factory.

• When uncrating the panels, always apply clamps on an A-frame before strapping band is cut from the crate.









• Use a forklift boom & pitch clamp to carefully move the panels from the original slim factory A-frame, to an A-frame with a wider base and more obtuse angle. We recommend padding the A-frame prior to placing the panels on to each of its sides.







• Use 3 straps to tie the panels to the A-frame, and wrap plastic around the entire A-frame 3X to prepare the package for shipment.







Handling





- For the correct handling of the pallets, a fork lift truck must be used, at least 8 ft. long, with the forks positioned in the largest width position.
- Under normal conditions, the forks are positioned in the middle of the long side of the pallet, as they must grip the whole depth of the pallet.
- To allow the loading or extraction of the slabs easily and safely, it is recommended to position the pallets in a suitable area where the lift truck can be moved around all sides of the pallet.



• On all LTL shipments (12 panels or less), always strap A-frames securely inside of a cab. Never clamp them.









- Pump Activated Suction cup handles are recommended to move a panel a short distance. Panel weight is approx. 140 lbs. and no more than 2 experienced people are suggested to move.
- To safely transport up to 8 slabs of 6mm from warehouse to job site we strongly recommend the use of a transporter. The transporter is also designed to store slabs on the job site.

See page 63 for recommended tool providers









• Make sure to use proper base support when standing a panel. The use of two support pieces about 2" thick and 24" from each end of the panel, or a solid base with protective cushioning is recommended.



PLEASE USE PROPER HANDLING TOOLS WHEN MOVING THE PANELS OR CRATES

- Forklift Extension See page 54
- Suction Cups See page 55
- Large Porcelain Panel Tile Transporter See page 55
- Forklift Boom & Pinch Clamp See page 54

See page 63-65 for recommended tool providers



OTHER HANDLING TOOLS NEEDED

- Rigid Working Table to Match the Dimension of the Panels 120" x 60" or larger See photo above.
- Scoring Tools See page 57-59
- Variable Speed Grinder With Electroplated Diamond Blades See page 57






Manipulation Full Cuts, Cut Outs, & MITERED EDGES

• The "score and snap" is the preferred method for straight cuts (from one end of the panel to the other) using a recommended tool.

See page 63-65 for recommended tool providers









- When planning a cut that will be the full length of the panel, either with a plunge cut, or starting at the edge, mark and drill a relief hole at the termination point of the cut, then cut towards the relief hole. Properly support piece equally across entire surface of the piece when setting in mortar and prior to handling for installation.
- When planning a plunge cut, drill a relief hole with a electroplated core bit at the termination point of the cut, prior to beginning the cut. Always cut towards the relief hole.
- When planning a "U" shaped cut, mark, and drill relief holes where the cut lines will intersect. Always make the shortest cuts first, leaving your waste/dropout attached to the largest part of your desired piece for the final cut.
- When planning an "L" shaped cut, mark and drill relief holes where the cut lines will intersect, always cut the shortest length first, and cut towards the relief hole.

See page 58 for cutting diagram







• When manipulating large porcelain panels, a variable speed right angle grinder is strongly suggested to reduce vibration. Electroplated diamond blades or electroplated diamond drill bits should be used for various cuts and manipulations.

See page 63-65 for recommended tool providers






Manipulation full cuts, cut outs, & MITERED EDGES


IMPORTANT: Always cut towards the relief hole.



When cutting a "U" shaped piece, mark, and drill relief holes where the cut lines intersect. Always make the shortest cut first.

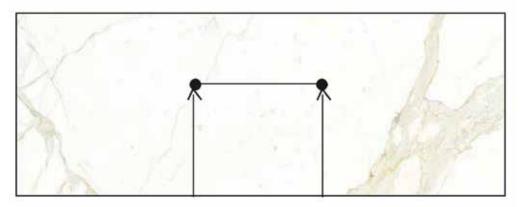

When cutting an "L", drill relief holes where the cut lines intersect, always make the shortest cut first.

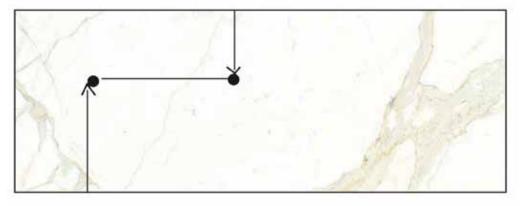

Color matched or tinted polyester, epoxy compounds or equivalent are often used to fill edges and bring the pieces together to form a smooth transition.





Manipulation full cuts, cut outs, & mitered edges

• For circular cut outs, a circular electroplated diamond core bit must be used with a variable speed grinder or drill.

See page 63-65 for recommended tool providers





• For straight line cut outs, a variable speed grinder with electroplated diamond blades must be used. Relief holes or cuts before planning a square or rectangular shape are necessary.







- When possible, it is best to fabricate niches and holes after the panel is already installed with thin set on wall or floor. If it is not possible to cut holes or square/rectangular cuts (fireplace, sink, etc.) before the panel is installed, create full support with plywood or MDF panel template with same shapes and cuts to attach and transport the porcelain panel. Support panels should only be detached when porcelain panels are fully bonded to the substrate.
- It is also possible to move panels with proper moving tools made of multiple suction cups to avoid tension of the panel after it is cut.





- Material can be mitered using proper tools. Colored or tinted compounds such as polyester, epoxy, or equivalent are often used to fill edges and bring the 45 degree miter cuts together.
- Material can be bullnosed the same as regular porcelain.





Floor / Wall Installation



- Large porcelain panels can be installed over concrete or other suitable substrates. You must honor all expansion joints or any defects in the substrate and mitigate prior to installation.
- Substrate should be a minimum of $\frac{1}{4}$ " over 10 feet in flatness.
- The back of the panel and substrate should be spread the same direction at the shortest distance with a modified LFT thin set mortar to achieve 100% coverage.



See page 63 for recommended trowels





- Self-leveling systems are required to acheive desired flatness between joints. Fill any voids with the mortar for complete support.
- Recommended tools and techniques need to be used to ensure full bond of the panel. Recommended techniques should be followed to move air out from underneath the panels.
- The setting material manufacturers have vast experience in the installation of porcelain tiles and large porcelain panels. Accordingly, we strongly recommend that the installer should contact the relevant setting material manufacturers and seek their advice prior to installation of our large porcelain panels.

See referenced manufacturers page 63-65 for contact details.

- It is very important to spread thin set the same direction on both the substrate and the panel, the shortest direction of panels. Thin set brands we recommend are: LFT by Mapei, Prolite by Custom, 254 Platinum by Laticrete, and x77 Walls & x78 Floors by Ardex Tec. See referenced manufacturers page 63-65 for contact details.
- Place tile into the fresh mortar and firmly press to cause the ridges to flatten out and come together into a continuous void free bed. Install desired spacers/levelers of preferred grout joint design width.
- Polymer added sanded and unsanded grout, epoxy grout, silicone, or polyurethane can be used to fill the joints. If using
- epoxy grout, make sure to follow proper cleaning instruction within the manufacturers' specific time frame.

 NOTE: Recommended 1/8" grout joint width should be maintained throughout the entire installation. Countertop seams can be butted.

Iris U.S./Maxfine does not accept any responsibility nor does it recommend a particular method of installation. It is the responsibility of the installer/buyer to design the tiling system based on the advice obtained from the setting material manufacturer.



- Large porcelain panels are ideal for exterior cladding of walls and vertical applications.
- We offer mechanical and bonded techniques.

Contact manufacturer for further information or to become a certified installer.



/ Countertop Fabrications

• Large porcelain panels are ideal for countertop installation with the proper substrate.

Contact manufacturer for further information or to become a certified installer.





Cleaning & Maintenance

FIRST CLEANING POST INSTALLATION

A PROPER INITIAL CLEANING AFTER INSTALLATION IS SUGGESTED.

PROFESSIONAL CLEANERS SHOULD BE USED TO MAKE SURE ALL CONSTRUCTION

RESIDUES ARE COMPLETELY REMOVED. (See below for recommended professional cleaners.)

CLEANING DURING INSTALLATION

Construction particles, dust, sand, and debris should be removed from the panel surface by sweeping with a soft brush.

Sand and other abrasive materials may scratch the floor, therefore the surfaces should always be kept free from dust, sand, and soil.

MAXFINE large porcelain panel surfaces should be properly covered and protected after the installation, and up to the completion of all construction.

ORDINARY MAINTENANCE

Large porcelain panels are a high quality, solid, nonporous product that require minimum maintenance. (For daily maintenance, see below for recommended household cleaners.)

RECOMMENDED CLEANERS FOR PROFESSIONAL USE

FILA CLEANING SOLUTIONS

FILA

10800 N.W. 21st Street #170

Miami, FL 33172

Phone 305.724.8939

Website www.filasolutions.com

For organic residue removal

FILA PS87

For cement-based residue removal

FILA DETERDEK

For epoxy removal

FILA CR10

AQUA MIX

AQUA MIX

7711 Center Ave Ste 500 Huntington Beach, CA 92647

TF 800-272-8786

www.aquamix.com

HILLYARD, INC.

HILLYARD, INC.

302 North 4th Street

St. Joseph, MO 64501

TF 800.365.1555

Fax 800.861.0256

Website www.hillyard.com

For lead or metal residue removal

For contractor pencil marks

For removal of metal marks

Crème Clean

RECOMMENDED CLEANERS FOR DAILY USE

HOUSEHOLD CLEANERS

Magic Eraser

Melamine Pad

Brasso Gel

Lysol Gel

All purpose ceramic cleaner

Windex

Baking Soda

Ammonia



Recommended Installation Accessories

TOOLS

RUSSO TRADING COMPANY INC

RUSSO TRADING COMPANY, INC.

4235 N 127th St.

Brookfield, WI 53005

Phone 855.782.8665

Fax 262.790.2177

www.RTCproducts.com

OMEGA DIAMOND INC

OMEGA DIAMOND INC.

10125 Ophir Road

Newcastle, CA 95658

Phone 888.996.4777

Fax 530.885.3785

www.omegadiamond.com

ABACO MACHINES USA (BOOM, PINCH CLAMP)

ABACO MACHINES USA

14508 S Garfield Ave

Paramount, CA 90723

Phone 310.532.0366

Fax 310.532.0499

www.abacomachines.com

SIGMA / ETM TOOLS

European Tile Masters, Inc.

27 Copper Ridge Rd

Trout Creek, MT. 59874

Phone 954.917.3599

Fax 954.917.3539

Website www.europeantilemasters.com

www.toolsfortile.com

RAIMONDI TOOLS

Donnelly Distribution LLC

N 56 W 24790 N Corporate Circle Unit A

Sussex, WI 53089

TF 800.625.6686

Phone 262.820.1212

Fax 262.820.1226

www.donnellydist.com

TROWELS

FLOW RIDGE TROWEL BY RAIMONDI

N63 W 22611 Main Street Unit C

TF 800.625.6686

Phone 262.820.1212

Fax 262.820.1226

www.raimondiusa.com

PREMIUM NOTCH TROWEL BY SUPERIOR BILT

PREMIUM NOTCH TROWEL BY SUPERIOR BILT

7711 Center Ave Ste 500

Huntington Beach, CA 92647

TF 800.272.8786

Phone 562.598.8808

Fax 800.200.7765

www.custombuildingproducts.com

DONNELLY DISTRIBUTION LLC

Sussex. WI 53089

EURO NOTCH TROWEL BY ETM

EUROPEAN TILE MASTERS, INC.

1830 Vista Way

Margate, FL 33063

Phone 954.917.3599

Fax 954.917.3539

www.europeantilemasters.com

www.toolsfortile.com



Recommended Installation Accessories

BLADES/BITS

CYCLONE

DIAMAX INDUSTRIES
949 W Marietta St X100

Atlanta, GA 30318

Phone 404.817.3232

www.diamaxinc.com

WEHA

WEHA USA

625 Griffith Rd Suite 120

Charlotte, NC 28217

Phone 704.940.0115

www.wehausa.com

BUILDING PRODUCTS

WEDI BOARD

WEDI Corportation

171 S Gary Ave

Carol Stream, IL 60188

Phone 877.933.wedi (9334)

Fax 847.357.9819

www.wedicorp.com

USG (CEMENT BOARD)

USG US Corporate Office

550 West Adams Street

Chicago, IL 60661

Phone 312.436.4000

www.usg.com

SCHLUTER SYSTEMS (KERDI BOARD)

SCHLUTER SYSTEMS L.P.

194 Pleasant Ridge Road

Plattsburgh, NY 12901-5841

TF 800.472.4588

Fax 800.477.9783

www.schluter.com

HARDIEBACKER BOARD

Available at most local hardware stores

ADHESIVES (COLORED EPOXY GLUE, ETC.)

AKEMI

INNOCHEM

Innovative Chemicals

4030 Pleasantdale Road Suite F

Doraville, GA 30340

Phone 770.409.8789

Fax 770.409.9096

www.akemina.com

TENAX

TENAX USA

625 Griffith Rd Suite 120

Charlotte, NC 28217

Phone 704.583.1173

www.tenax4you.com



Recommended Installation Accessories

SETTING MATERIALS (THIN SET, GROUT, ETC.)

BOSTIK

BOSTIK, INC.

11320 W Watertown Plank Road

Wauwatosa, WI 53226

TF 800.762.7845

www.bostik-us.com

MAPEI

MAPEI Americas Headquarters

1144 E. Newport Center Drive

Deerfield Beach, FL 33442

TF 800.992.6273

Fax 954.246.8805

www.mapei.us

ARDEX

ARDEX Americas

400 Ardex Park Drive

Aliquippa, PA 15001

Phone 888.512.7339

www.ardexamericas.com

LATICRETE

LATICRETE International, Inc.

One LATICRETE Park North

Bethany, CT 06524-3423 USA

TF 800.243.4788

www.laticrete.com

TEC

H.B. FULLER CONSTRUCTION PROJECTS INC.

1105 S Frontenac Street

Aurora, IL 60504

TF 800.552.6225

Phone 562.598.8808

www.tecspecialty.com

CUSTOM BUILDING PRODUCTS

CUSTOM BUILDING PRODUCTS

7711 Center Ave Ste 500

Huntington Beach, CA 92647

TF 800.272.8786

Phone 562.598.8808

Fax 800.200.7765

www.custombuildingproducts.com

GET CERTIFIED NOW!



FACTORY ADVANCED CERTIFIED TRAINING

is implemented in our TN manufacturing facility by experts knowledgeable with MaxFine.

Participants learn how to handle, fabricate, and install our large porcelain panels for interior, exterior, floor, and wall applications. Upon completion and passing of our testing, they are then certified. Most importantly, participants obtain knowledge and hands on experience!

Please contact FACT@irisus.com for further information, or to participate in a training session.







Quality Assurance Certificate

Congratulations on purchasing exquisite large porcelain panels, MaxFine by FMG.

These innovative large porcelain panels with state-of-the-art technology provide the aesthetics of a beautiful marble or stone, but contain the durability of porcelain.

For these reasons and your investment, we educate, train, and certify installers and fabricators throughout the nation at our Large Porcelain Panel Training Center in our manufacturing facility to properly handle, fabricate, and install these panels.

A factory certified installer is highly recommended for installation.


Please ask your retailer for a list of certified contractors.



www.irisus.com



PRODUCT	SIZE (IN.)	BOX PIECES	BOX SF	PALLET BOXES	PALLET SF	THICKNESS (MM)	WEIGHT LB/Box
Large Porcelain Panel	120 x 60	1	48.44	12	581.256	6	139.4604
	120 x 40	1	32.29	16	516.672	6	92.97357
	60 x 60	1	24.22	24	581.256	6	69.72907
	60 x 40	1	16.14	40	645.6	6	46.512
	60 x 30	2	24.22	25	605.475	6	69.72907
	40 x 40	2	21.53	20	430.56	6	61.98238
	30 x 30	3	18.16	36	654.107	6	52.29736
	30 x 15	6	18.16	36	654.107	6	52.29736

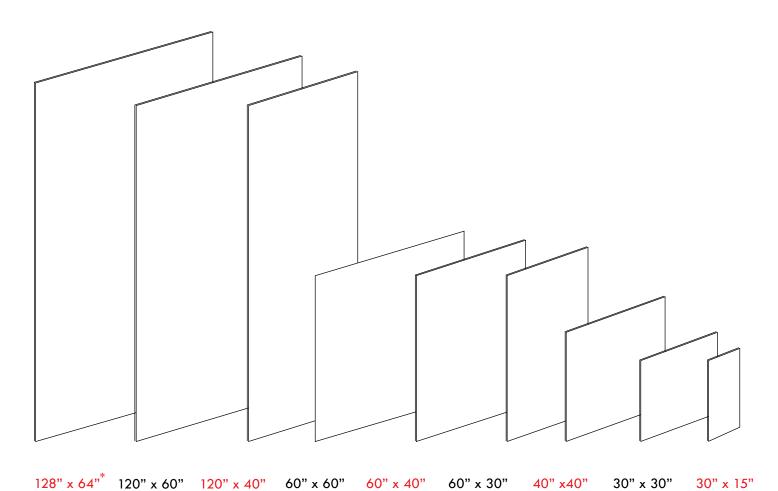

*Available upon request.



FULL-BODY MANUFACTURED NATURAL STONES WITH PORCELAIN TECHNICAL FEATURES

PHYSICAL - VISUAL PROPERTIES	ASTM TEST	INDUSTRY STANDARD	IRIS RESULTS	
Water Absorption	C373	< 0.5%	< 0.1%	
Thickness Dimension	C499	Range \pm 0.04 Inc. Max.	≤± 0.04 Inc.	
Facial Dimension	C499	± 0.025%	≤± 0.025%	
Warpage Average Diagonal	C485	± 0.40%	≤± 0.40%	
Warpage Average Edge	C485	± 0.40%	≤± 0.40%	
Wedging	C502	± 0.25%	≤± 0.25%	
Bond Strength	C482	≥ 0.50 psi	≥ 0.200 psi	
Breaking Strength	C648	≥ 250 lb.	≥ 350 lb.	
Hardness (Mohs)	Scratch Test (No Regulation)	Range 0 - 10	≥7	
Visible Abrasion Resistance for Glazed Tiles	C1027	No Requirement Range 0 - 5	Class 3 - 4	
Deep Abrasion Resistance for Un-Glazed Tiles	C1243	Impervious (Porcelain) Class P1: ≤ 175 mm	≤ 175 mm	
Frost Resistance	C1026	No sample must show alterations to the surfaces	No evidence of damage	
Chemical Resistance	C650	No Requirement Range E - A	Class A	
Stain Resistance	C1378	No Requirement Range E - A	Class A*	
DCOF	BOT 3000	≥ 0.42*	≥ 0.42 - ≥ 0.60*	
Aesthetic Classification	hetic Classification Visual Evaluation Shade & Texture		V2 - V3	
Robinson Test	AC627	Classified as "Extra Heavy"		

 $^{^{}f{*}}$ All values are given for Matte or Honed Material.

Iris U.S. Customer Service 800.323.9906

www.irisus.com



