


SLIDE



Slide Emerald Wall 4" x 12"



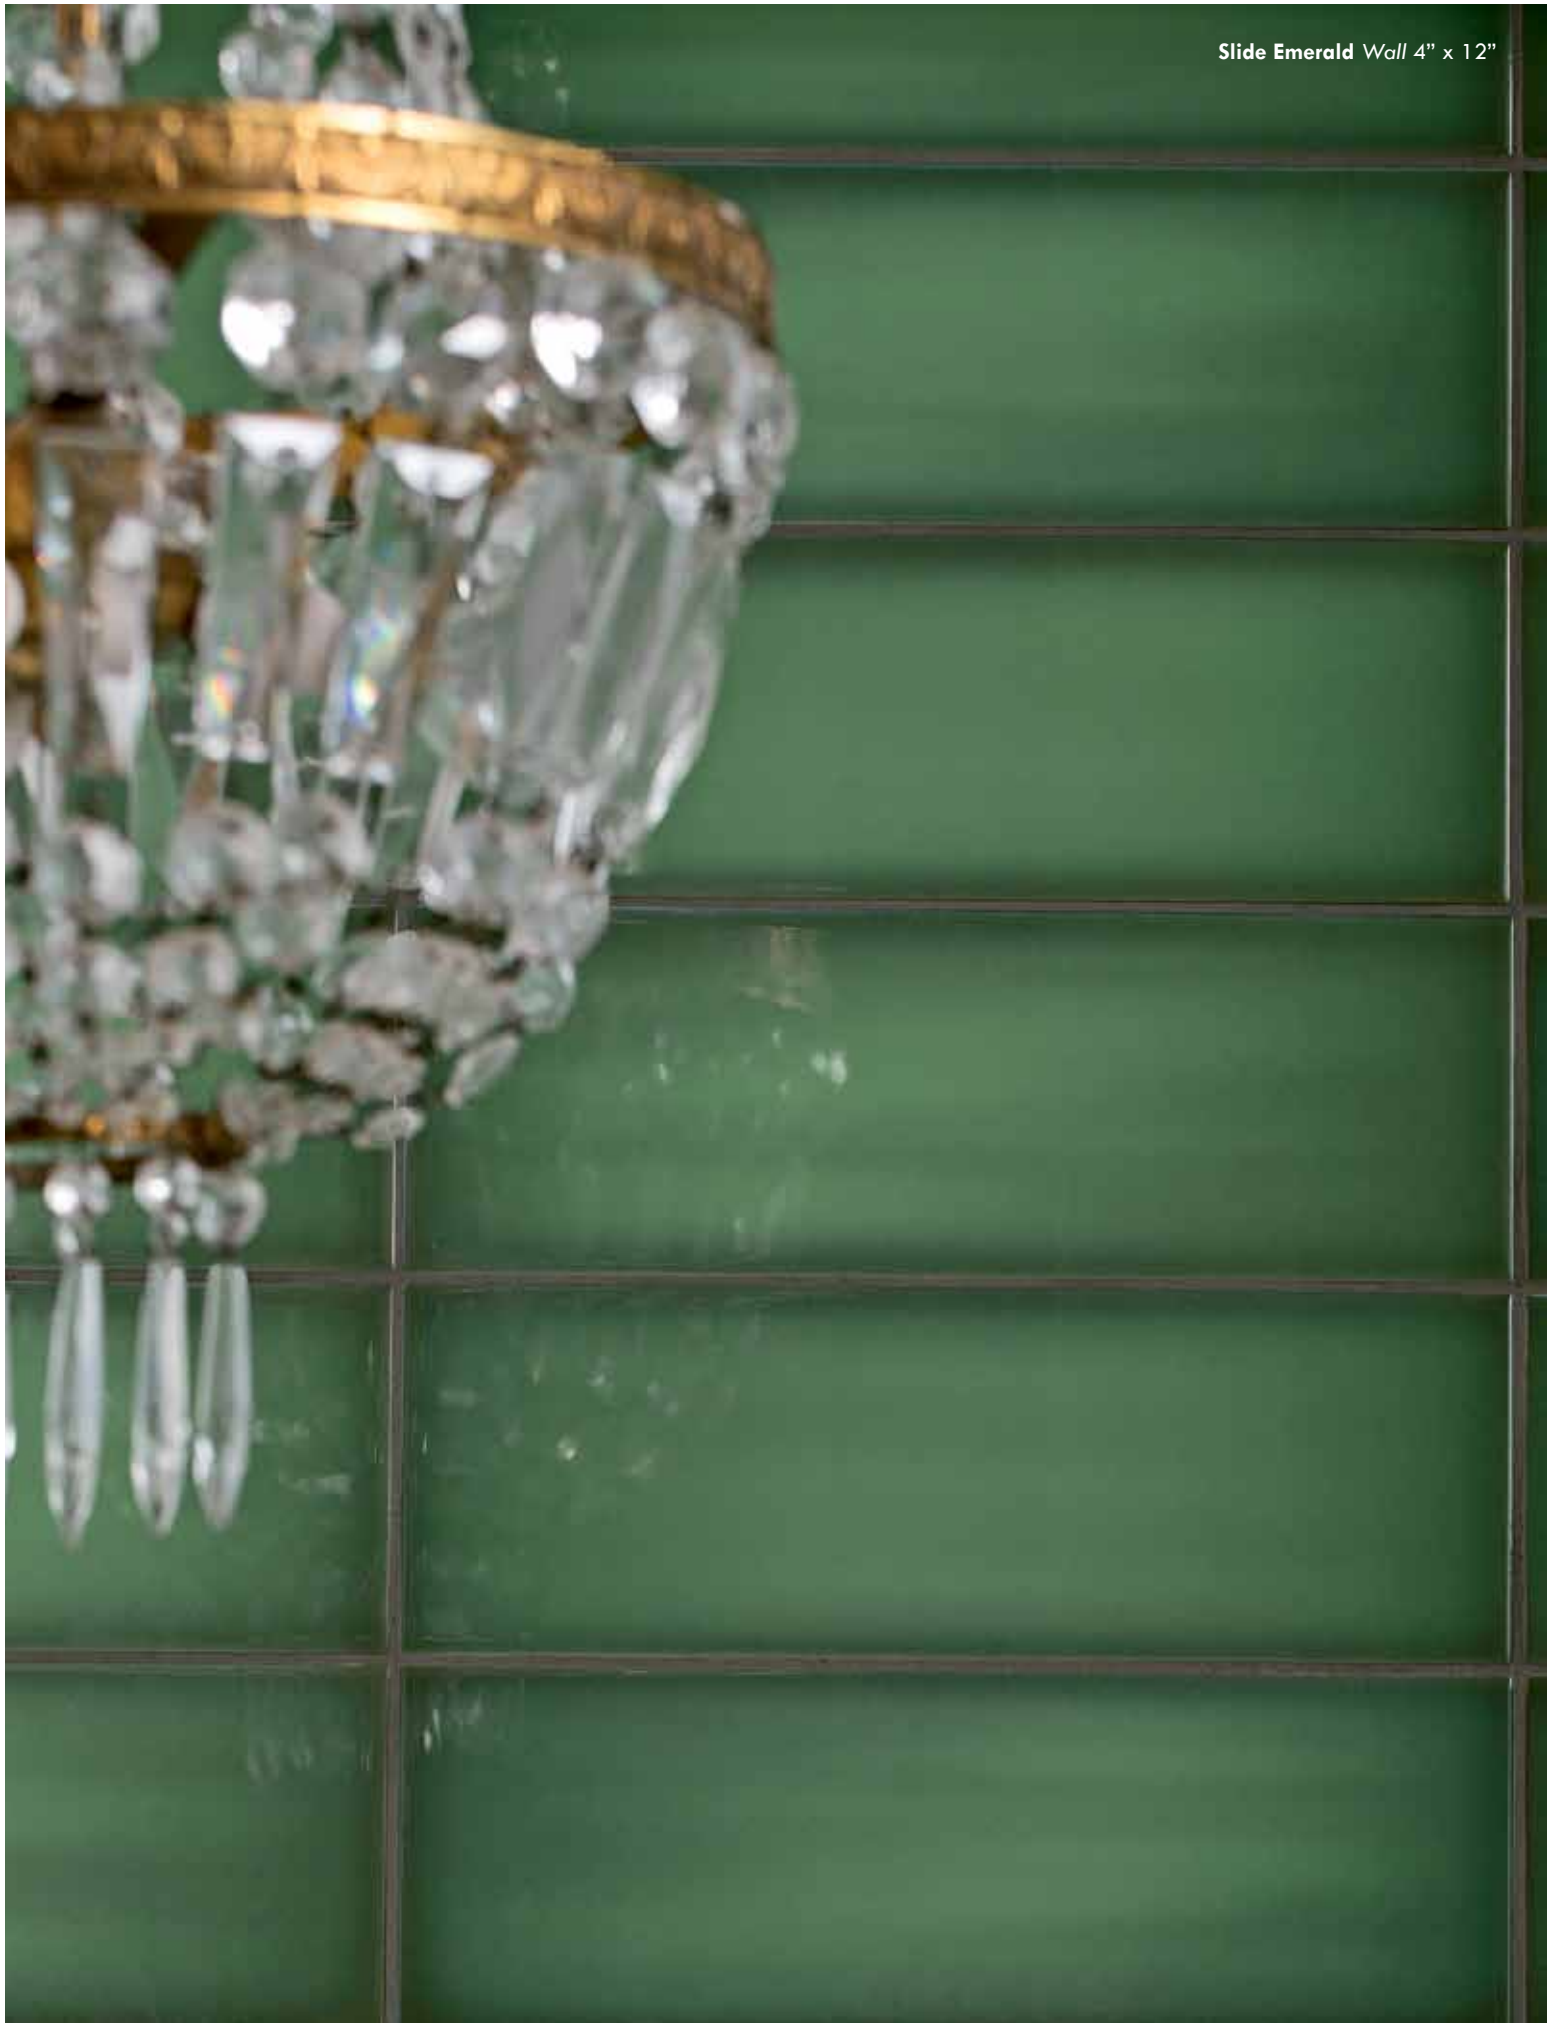


Slide Ocean & Sand Wall 8" x 24"





Slide Grey, White, Ocean, & Emerald Wall 8" x 24"



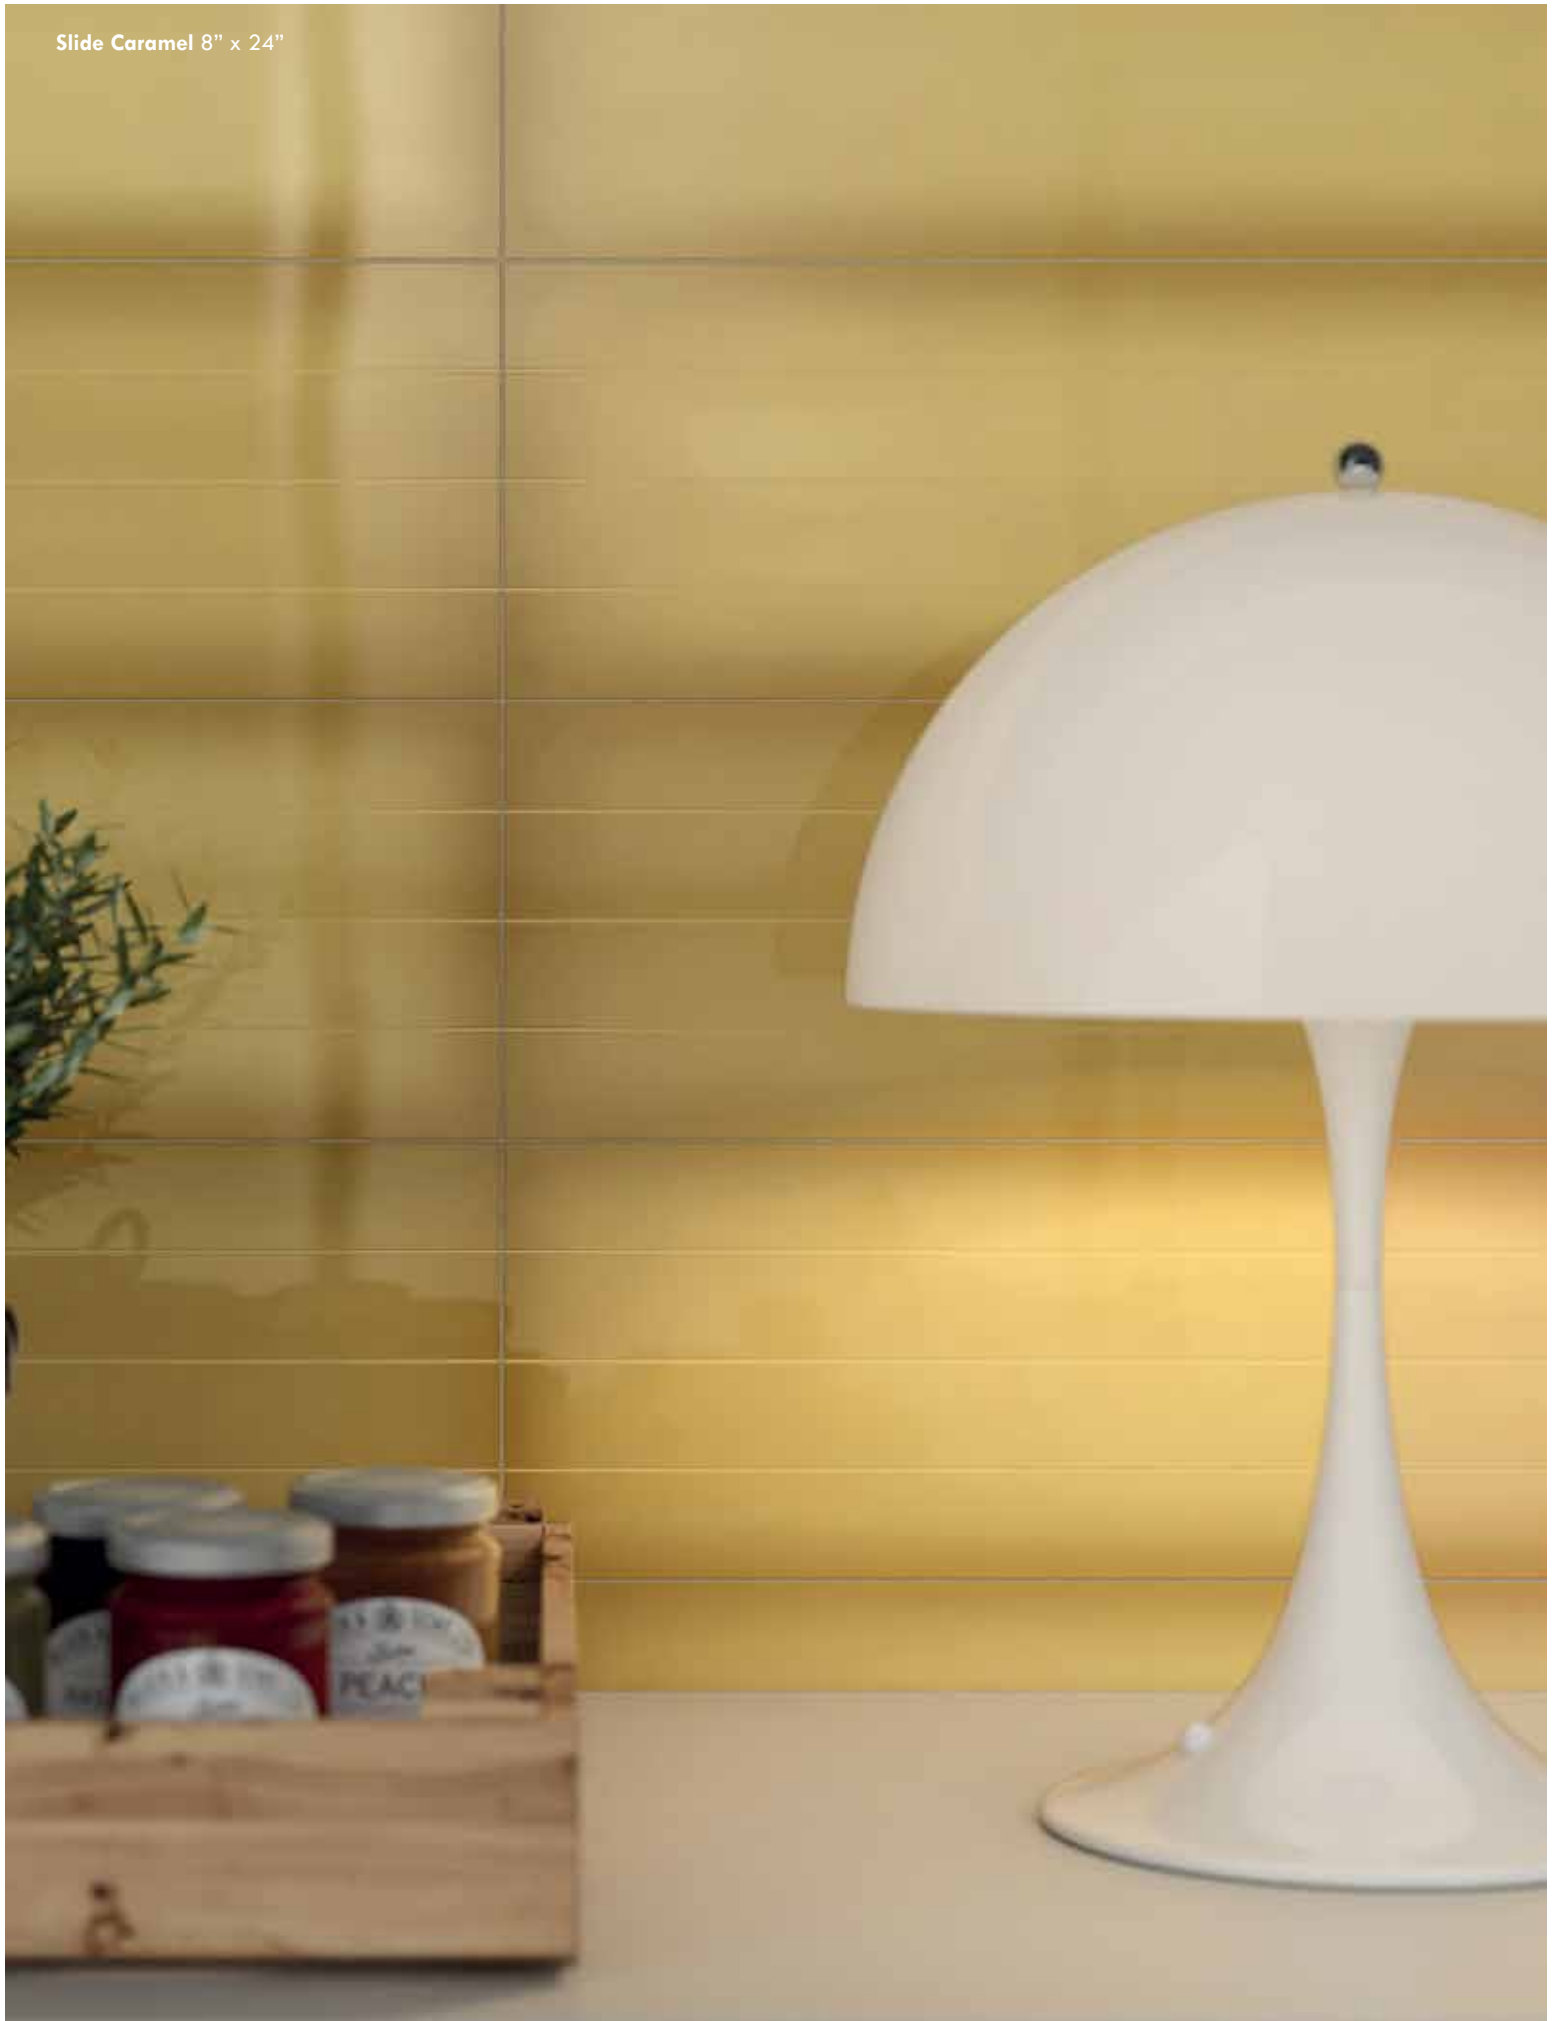



Slide Mink Wall 4" x 12"





Slide Mink Wall 4" x 12"

Slide Wall Collection



White



8 x 24
Glossy

562221



4 x 12
Glossy

754894



Sand



8 x 24
Glossy

562225



4 x 12
Glossy

754898



Caramel



8 x 24
Glossy

562227



4 x 12
Glossy

754900



Mink



8 x 24
Glossy

562226



4 x 12
Glossy

754899



Emerald



8 x 24
Glossy

562222



4 x 12
Glossy

754895



Ocean




8 x 24
Glossy

562223



4 x 12
Glossy

754896

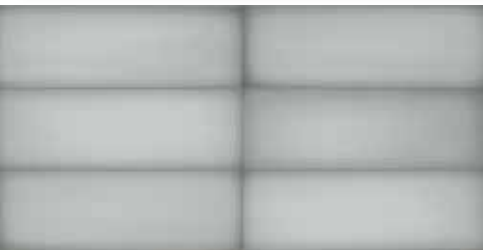

Grey



8 x 24
Glossy

562224



4 x 12
Glossy

754897



DI SEGALE
AI SEMI DI PAPAVER
AI SEMI DI SESAMO
INTEGRALE



Slide Wall Tech Specs

PHYSICAL PROPERTIES

CALIBRATED

Nominal Size
Caliber Range
Warpage Edge
Warpage Diagonal
Wedging

RECTIFIED

Nominal Size
Caliber Range
Warpage Edge
Warpage Diagonal
Wedging

ALL GLAZED WALL TILE

Mounting
Thickness³
Bond Strength
Water Absorption
Color Uniformity²
Crazing Resistance
Thermal Shock
Chemical Resistance
Stain Resistance
Breaking Strength
Resistance to Freeze/Thaw Cycling⁴

TEST

ASTM C499
Variation from average facial dimension of sample,
tested per ASTM C499
ASTM C485
ASTM C485
ASTM C502
ASTM C499
Variation from average facial dimension of sample,
tested per ASTM C499
ASTM C485
ASTM C485
ASTM C502
Section 9.5
ASTM C499
ASTM C482
ASTM C373
ASTM C609 and Section 9.3
ASTM C424
ASTM C484
ASTM C650
ASTM C1378
ASTM C648
ASTM C1026

GLAZED WALL TILE SPECIFICATION⁵

MINIMUM	MAXIMUM
-2.00%	2.00%
-0.30% or -0.04 in (1.0 mm) ¹	-0.30% or -0.04 in (1.0 mm) ¹
-0.30% or -0.04 in (1.0 mm) ¹	-0.40% or -0.05 in (1.3 mm) ¹
-0.30% or -0.05 in (1.3 mm) ¹	-0.40% or -0.07 in (1.8 mm) ¹
-0.40% or -0.05 in (1.3 mm) ¹	-0.40% or -0.05 in (1.3 mm) ¹
-2.00%	2.00%
-0.25% or -0.03 in (0.8 mm) ¹	-0.25% or -0.03 in (0.8 mm) ¹
-0.30% or -0.04 in (1.0 mm) ¹	-0.40% or -0.05 in (1.3 mm) ¹
-0.30% or -0.05 in (1.3 mm) ¹	-0.40% or -0.07 in (1.8 mm) ¹
-0.25% or -0.03 in (0.8 mm) ¹	-0.25% or -0.03 in (0.8 mm) ¹
Pass	Pass
N/A	Range: 0.031 in (0.079 mm)
≥ 50 psi (0.34 MPa)	
P4	P4
N/A	VO - 3 Judds
Pass	
Pass	
As Reported	As Reported
As Reported	As Reported
Average ≥ 125 lbf. (1.11 kN) / Individual ≥ 100 lbf. (0.44 kN)	
As Reported	As Reported

¹ Whichever is less ² Class VO Tile Only ³ May not apply to textured surfaces or tiles with uneven back patterns ⁴ When installation subject to freeze/thaw conditions

⁵ These specifications do not include pressed floor tile, porcelain tile, quarry tile, nor mosaics, when used on walls.

Slide Packaging

PRODUCT	SIZE	BOX PIECES	BOX SF	PALLET BOXES	PALLET SF	THICKNESS	WEIGHT LB/SF	WEIGHT LB/BOX
Wall Tile	8" x 24"	10	12.912	48	619.7	8.5 mm	2.36	30.413
	4" x 12"	34	10.98	80	878.4	7.5 mm	2.83	31.073

Color Shade Variations

As in nature, our products vary piece to piece. Please refer to the graph for variations.



V1

Difference among pieces
from the same color
are minimal



V2

Shade variance
within the
same color




V3

Significant shade
variation within the
same color



V4

Extreme shade variation,
piece to piece, within the
same color

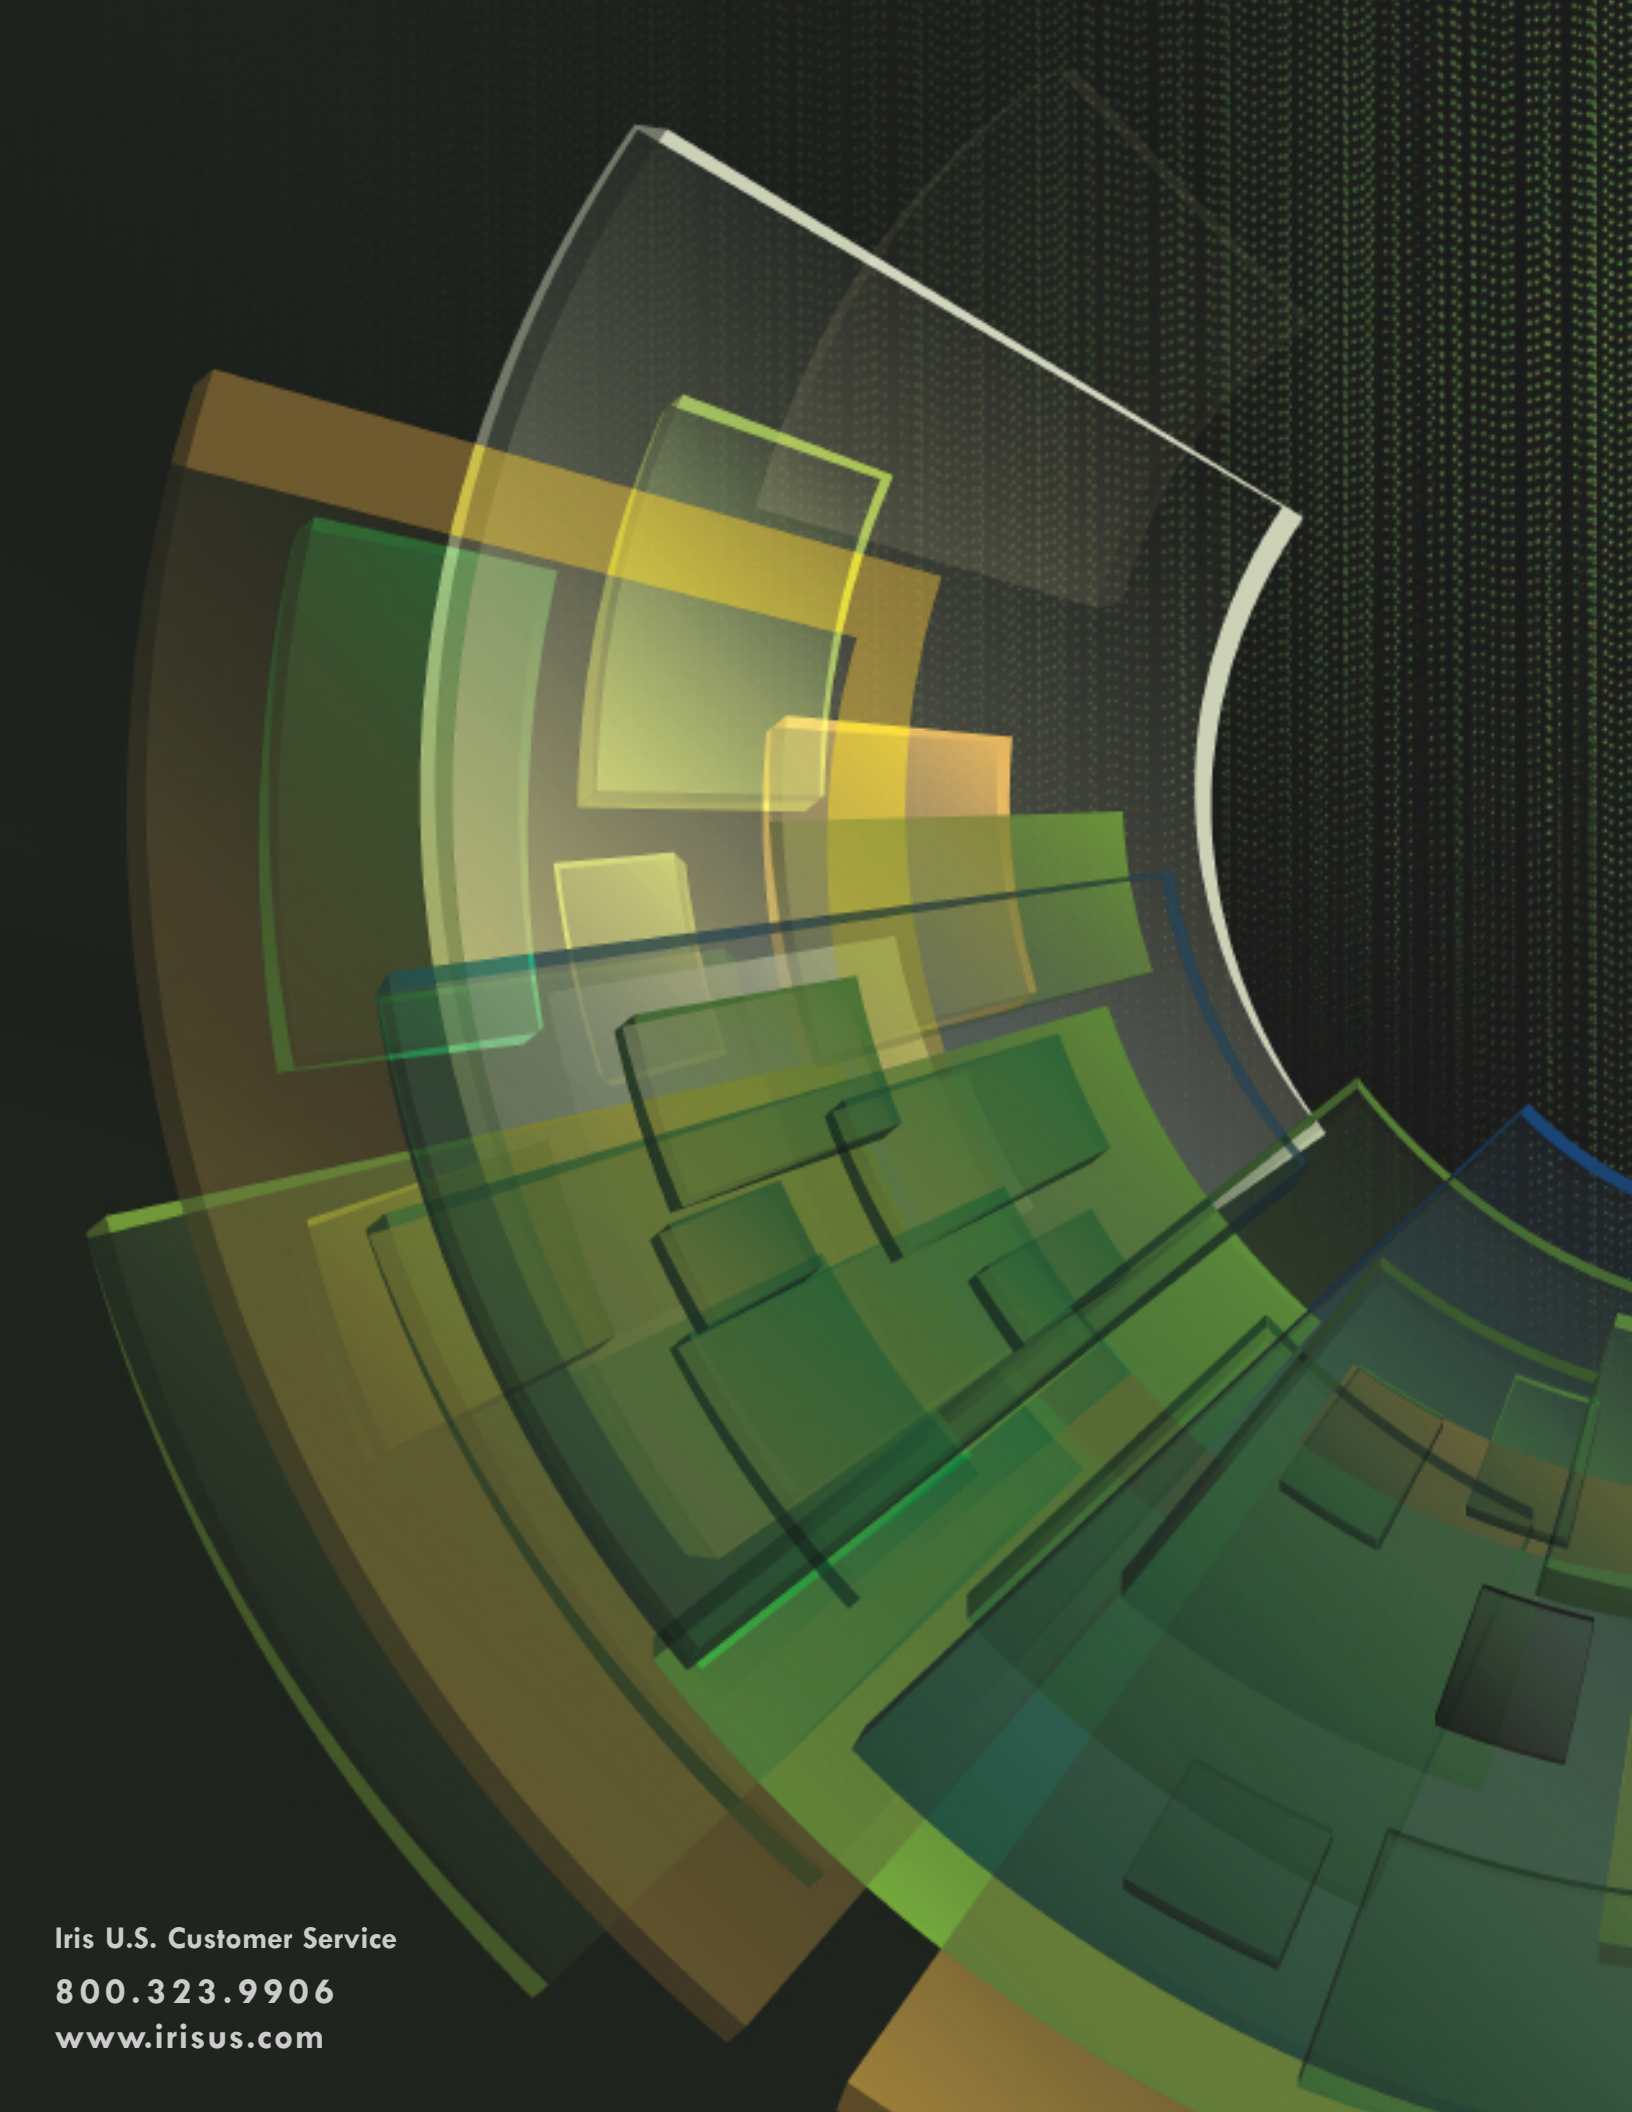

Iris U.S. Customer Service
800.323.9906
www.irisus.com